- Floor standing
- Desktop Water Dispensers
- Water Purifier
- Others

IDEAL BUSINESS SOLUTIONS LTD.

YEAR 2021

iDeal Business SOLUTIONS

GOOD MARKETING makes the company look smart

GREAT MARKETING makes the customer feel smart

- JOE CHERNOV

iDeal Business Solutions Shpk.
Brigada e VIII-te str., Bldg. 14, Entrance 11/7, 1019, Tirana, Albania
Tel: +355 42 201201 / Mob: +355 692238206

Floor Standing Water Dispensers

iDeal Business SOLUTIONS

BH-YLR-LB-106L

- Ultra hygienic safe & durable water
- Stylish & attractive plastic front design
- Using plastic with bacterium-resistance function
- Stainless steel for cold and hot tank
- Adjustable temp. control throuth thermostat
- High efficiency compressor cooling
- Double safty protection against low water lever
- Large storage cabinet/refrigerator
- Pou water dispenser

Model NO.	BH-YLR-LB-106L
Filter(RO system)	PP+UDF+CTO+RO+T33
Description	Hot & cold Compressor cooling with storage cabinet
Rated voltage/frequenc	220-240V/110-127V 50/60Hz
Heating power	550W
Cooling power	90W
Heating capacity	5L/h,85-95℃
Cooling capacity	2L/h,5-10℃
Packing dimension	32.5x40x115cm
Loading Qty.	406PCS/40' HC

iDeal Business
SOLUTIONS

BH-YLR-LB-92L

- Ultra hygienic safe & durable water
- Stylish & attractive plastic front design
- Using plastic with bacterium-resistance function
- Stainless steel for cold and hot tank
- Adjustable temp. control throuth thermostat
- High efficiency compressor cooling
- Double safty protection against low water lever
- Large storage cabinet/refrigerator
- Pou water dispenser

Model NO.	BH-YLR-LB-92L
Filter(RO system)	PP+UDF+CTO+RO+T33
Description	Hot & cold Compressor cooling with storage cabinet
Rated voltage/frequenc	220-240V/110-127V 50/60Hz
Heating power	550W
Cooling power	90W
Heating capacity	5L/h,85-95℃
Cooling capacity	2L/h,5-10℃
Packing dimension	32.5x38x100cm
Loading Qty.	511PCS/40' HC

BH-YLR-LB-107L

- Ultra hygienic safe & durable water
- Stylish & attractive plastic front design
- Using plastic with bacterium-resistance function
- Stainless steel for cold and hot tank
- Adjustable temp. control throuth thermostat
- High efficiency compressor cooling
- Double safty protection against low water lever
- Large storage cabinet/refrigerator
- Pou water dispenser

Model NO.	BH-YLR-LB-107L
Filter(RO system)	PP+UDF+CTO+RO+T33
Description	Hot & cold Compressor cooling with storage cabinet
Rated voltage/frequenc	220-240V/110-127V 50/60Hz
Heating power	550W
Cooling power	90W
Heating capacity	5L/h,85-95℃
Cooling capacity	2L/h,5-10℃
Packing dimension	32.5x40x115cm
Loading Qty.	406PCS/40' HC

BH-YLR-LB-93L

- Ultra hygienic safe & durable water
- Stylish & attractive plastic front design
- Using plastic with bacterium-resistance function
- Stainless steel for cold and hot tank
- Adjustable temp. control throuth thermostat
- High efficiency compressor cooling
- Double safty protection against low water lever
- Large storage cabinet/refrigerator
- Pou water dispenser

Model NO.	BH-YLR-LB-93L
Filter(RO system)	PP+UDF+CTO+RO+T33
Description	Hot & cold Compressor cooling with storage cabinet
Rated voltage/frequenc	220-240V/110-127V 50/60Hz
Heating power	550W
Cooling power	90W
Heating capacity	5L/h,85-95℃
Cooling capacity	2L/h,5-10℃
Packing dimension	32.5x38x100cm
Loading Qty.	510PCS/40' HC

BH-YLR-LB-105L

- Ultra hygienic safe & durable water
- Stylish & attractive plastic front design
- Using plastic with bacterium-resistance function
- Stainless steel for cold and hot tank
- Adjustable temp. control throuth thermostat
- High efficiency compressor cooling
- Double safty protection against low water lever
- Large storage cabinet/refrigerator
- Pou water dispenser

Model NO.	BH-YLR-LB-105L
Filter(RO system)	PP+UDF+CTO+RO+T33
Description	Hot & cold Compressor cooling with storage cabinet
Rated voltage/frequenc	220-240V/110-127V 50/60Hz
Heating power	550W
Cooling power	90W
Heating capacity	5L/h,85-95℃
Cooling capacity	2L/h,5-10℃
Packing dimension	39x36x105cm
Loading Qty.	180PCS/20' GP 360PCS/40' HC

iDeal Business SOLUTIONS

BH-YLR-LB-16L-D/E

- Ultra hygienic safe & durable water
- Stylish & attractive plastic front design
- Using plastic with bacterium-resistance function
- Stainless steel for cold and hot tank
- Adjustable temp. control throuth thermostat
- High efficiency compressor cooling
- Double safty protection against low water lever
- Large storage cabinet/refrigerator

Model NO.	BH-YLR-LB-16L-D/E
Filter(RO system)	PP+UDF+CTO+RO+T33
Description	Hot & cold Compressor cooling with storage cabinet
Rated voltage/frequenc	220-240V/110-127V 50/60Hz
Heating power	550W
Cooling power	90W
Heating capacity	5L/h,85-95℃
Cooling capacity	2L/h,5-10℃
Packing dimension	34x33x98cm
Loading Qty.	238PCS/20' GP 490PCS/40' HC

BH-YLR-LB-108

- Ultra hygienic safe & durable water
- Stylish & attractive plastic front design
- Using plastic with bacterium-resistance function
- Stainless steel for cold and hot tank
- Adjustable temp. control throuth thermostat
- High efficiency compressor cooling
- Double safty protection against low water lever
- Large storage cabinet/refrigerator

Model NO.	BH-YLR-LB-108
Description	Hot & cold Compressor cooling with storage cabinet
Rated voltage/frequenc	220-240V/110-127V 50/60Hz
Heating power	550W
Cooling power	90W
Heating capacity	5L/h,85-95℃
Cooling capacity	2L/h,5-10℃
Packing dimension	34x33x98cm
Loading Qty.	238PCS/20' GP 490PCS/40' HC

BH-YLR-LB-103L

- Ultra hygienic safe & durable water
- Stylish & attractive plastic front design
- Using plastic with bacterium-resistance function
- Stainless steel for cold and hot tank
- Adjustable temp. control throuth thermostat
- High efficiency compressor cooling
- Double safty protection against low water lever
- Large storage cabinet/refrigerator

Model NO.	BH-YLR-LB-103L
Description	Hot & cold Compressor cooling with storage cabinet
Rated voltage/frequenc	220-240V/110-127V 50/60Hz
Heating power	550W
Cooling power	90W
Heating capacity	5L/h,85-95℃
Cooling capacity	2L/h,5-10℃
Packing dimension	32.5x33x105cm
Loading Qty.	490PCS/40' HC

iDeal Business SOLUTIONS

BH-YLR-LB-56A

- Ultra hygienic safe & durable water
- Stylish & attractive plastic front design
- Using plastic with bacterium-resistance function
- Stainless steel for cold and hot tank
- Adjustable temp. control throuth thermostat
- High efficiency compressor cooling
- Double safty protection against low water lever
- Large storage cabinet/refrigerator

Model NO.	BH-YLR-LB-56A
Description	Hot & cold Compressor cooling with storage cabinet
Rated voltage/frequenc	220-240V/110-127V 50/60Hz
Heating power	550W
Cooling power	90W
Heating capacity	5L/h,85-95℃
Cooling capacity	2L/h,5-10℃
Packing dimension	34x33x98cm
Loading Qty.	238PCS/20' GP 476PCS/40' HC

BH-YLR-LB-08

- Ultra hygienic safe & durable water
- Stylish & attractive plastic front design
- Using plastic with bacterium-resistance function
- Stainless steel for cold and hot tank
- Adjustable temp. control throuth thermostat
- High efficiency compressor cooling
- Double safty protection against low water lever
- Large storage cabinet/refrigerator

Model NO.	BH-YLR-LB-08
Filter(RO system)	PP+UDF+CTO+RO+T33
Description	Hot & cold Compressor cooling with storage cabinet
Rated voltage/frequenc	220-240V/110-127V 50/60Hz
Heating power	550W
Cooling power	90W
Heating capacity	5L/h,85-95℃
Cooling capacity	2L/h,5-10℃
Packing dimension	34x33x98cm
Loading Qty.	238PCS/20' GP 490PCS/40' HC

BH-YLR-RO-89L
BH-YLR-UF-89L

BH-YLR-RO-16L/E
BH-YLR-UF-16L/E

Filter(RO system)	PP+UDF+CTO+RO+T33
Description	Hot & cold Compressor cooling with standard 5-stage RO system
Rated voltage/frequenc	220-240V/110-127V 50/60Hz
Purified capacity	62.5L/H
Heating power	550W
Cooling power	90W
Heating capacity	5L/h,85-95℃
Cooling capacity	2L/h,5-10℃
Packing dimension	34x33x98cm
Loading Qty.	238PCS/20' GP 476PCS/40' HC

Filter(UF system)	PP+UDF+CTO+UF+T33
Description	Hot & cold Compressor cooling with standard 5-stage UF system
Rated voltage/frequenc	220-240V/110-127V 50/60Hz
Purified capacity	7.8L/H
Heating power	550W
Cooling power	90W
Heating capacity	5L/h,85-95℃
Cooling capacity	2L/h,5-10℃
Packing dimension	34x33x98cm
Loading Qty.	238PCS/20' GP 490PCS/40' HC

iDeal Business SOLUTIONS

BH-YLR-RO-91L

- Ultra hygienic safe & durable water
- Stylish & attractive plastic front design
- Using plastic with bacterium-resistance function
- Stainless steel for cold and hot tank
- Adjustable temp. control throuth thermostat
- High efficiency compressor cooling
- Double safty protection against low water lever
- Large storage cabinet/refrigerator

Model NO.	BH-YLR-RO-91L
Filter(RO system)	PP+UDF+CTO+RO+T33
Description	Hot & cold Compressor cooling with storage cabinet
Rated voltage/frequenc	220-240V/110-127V 50/60Hz
Heating power	550W
Cooling power	90W
Heating capacity	5L/h,85-95℃
Cooling capacity	2L/h,5-10℃
Packing dimension	32.5x33x98cm
Loading Qty.	490PCS/40' HC

BH-YLR-LB-08M1

BH-YLR-LB-08M2

Model NO.	BH-YLR-LB-08M1	BH-YLR-LB-08M2	BH-YLR-LB-12LD-SX
Description	Hot & cold Compressor cooling with storage cabinet	Hot & cold Compressor cooling with storage cabinet	Hot & cold Compressor cooling with storage cabinet
Rated voltage/frequenc	220-240V/110-127V 50/60Hz	220-240V/110-127V 50/60Hz	220-240V/110-127V 50/60Hz
Heating power	550W	550W	550W
Cooling power	90W	90W	90W
Heating capacity	5L/h,85-95℃	5L/h,85-95℃	5L/h,85-95℃
Cooling capacity	2L/h,5-10℃	2L/h,5-10℃	2L/h,5-10℃
Packing dimension	31x31x 87cm	31x31x 87cm	33x32.5x88cm
Loading Qty.	238PCS/20' GP 777PCS/40' HQ	238PCS/20' GP 777PCS/40' HQ	238PCS/20' GP 777PCS/40' HQ

IP-16C

31*31*86cm³

IP-08A

34*33*98cm³

IP-178

34*33*98cm³

IP-63

34*33*98cm³

Type	Bottle uploading		
Heating capacity	500W/85-95℃		
Cooling capacity	75W/10-15 ℃	90W/6-10℃	95W/6-10℃
	Eletronic	Compressor with cabinet	Compressor with freezer
Tank volume	1/1.4 Litre	1/3 Litre	1/3 Litre
Material	ABS plastic and 0.5mm side plate		
20ft/40HQ	280/658PCS		
OEM	LOGO/COLOR/CARTON BOX/USER MANUAL		

General Configuration

*Hot and cold
*With cabinet
*Asbeila brand
*Compressor cooling system
*Welding SS304 tank

MOQ: 1*20ft container

IP-71
34*33*98cm³

IP-1135
34*33*98cm³

IP-28
34*33*102cm³

IP-1292
34*33*98cm³

Type	Bottle uploading		
Heating capacity	500W/85-95℃		
Cooling capacity	75W/10-15 ℃	90W/6-10℃	95W/6-10℃
	Eletronic	Compressor with cabinet	Compressor with freezer
Tank volume	1/1.4 Litre	1/3 Litre	1/3 Litre
Material	ABS plastic and 0.5mm side plate		
20ft/40HQ	280/658PCS		
OEM	LOGO/COLOR/CARTON BOX/USER MANUAL		

General Configuration

*Hot and cold
*With cabinet
*Asbeila brand
*Compressor cooling system
*Welding SS304 tank

MOQ: 1*20ft container

IP-08
34*33*98cm³

IP-89
34*33*98cm³

IP-1136
34*33*98cm³

IP-63A
34*33*98cm³

Type	Bottle uploading		
Heating capacity	500W/85-95℃		
Cooling capacity	75W/10-15℃	90W/6-10℃	95W/6-10℃
	Eletronic	Compressor with cabinet	Compressor with freezer
Tank volume	1/1.4 Litre	1/3 Litre	1/3 Litre
Material	ABS plastic and 0.5mm side plate		
20ft/40HQ	280/658PCS		
OEM	LOGO/COLOR/CARTON BOX/USER MANUAL		

General Configuration

*Hot and cold
*With cabinet
*Asbeila brand
*Compressor cooling system
*Welding SS304 tank

MOQ: 1*20ft container

IP-03
34*33*98cm³

IP-96L
34*33*98cm³

IP-22
34*33*98cm³

IP-58
34*33*98cm³

IP-95
34*33*98cm³

Type	Bottle uploading		
Heating capacity	500W/85-95℃		
Cooling capacity	75W/10-15 ℃	90W/6-10℃	95W/6-10℃
	Eletronic	Compressor with cabinet	Compressor with freezer
Tank volume	1/1.4 Litre	1/3 Litre	1/3 Litre
Material	ABS plastic and 0.5mm side plate		
20ft/40HQ	280/658PCS		
OEM	LOGO/COLOR/CARTON BOX/USER MANUAL		

General Configuration

*Hot and cold
*With cabinet
*Asbeila brand
*Compressor cooling system
*Welding SS304 tank

MOQ: 1*20ft container

IP-29
34*33*98cm³

IP-1138
34*33*98cm³

IP-98
34*33*98cm³

IP-37
34*33*98cm³

IP-1291
34*33*98cm³

Type	Bottle uploading		
Heating capacity	500W/85-95℃		
Cooling capacity	75W/10-15℃	90W/6-10℃	95W/6-10℃
	Eletronic	Compressor with cabinet	Compressor with freezer
Tank volume	1/1.4 Litre	1/3 Litre	1/3 Litre
Material	ABS plastic and 0.5mm side plate		
20ft/40HQ	280/658PCS		
OEM	LOGO/COLOR/CARTON BOX/USER MANUAL		

General Configuration

*Hot and cold
*With cabinet
*Asbeila brand
*Compressor cooling system
*Welding SS304 tank

MOQ: 1*20ft container

IP-97
32.5*33*105cm³

IP-1596
34*33*100cm³

IP-8201
29*52*120cm³

Type	Bottle uploading		
Heating capacity	500W/85-95℃		
Cooling capacity	75W/10-15℃	90W/6-10℃	95W/6-10℃
	Eletronic	Compressor with cabinet	Compressor with freezer
Tank volume	1/1.4 Litre	1/3 Litre	1/3 Litre
Material	ABS plastic and 0.5mm side plate		
20ft/40HQ	Pending		
OEM	LOGO/COLOR/CARTON BOX/USER MANUAL		

General Configuration

*Hot and cold
*With cabinet
*Asbeila brand
*Compressor cooling system
*Welding SS304 tank

MOQ: 1*20ft container

IP-28L
34*33*110cm³

IP-3602-2F
48*34*118cm³

IP-105L
32*35*103cm³

IP-YD1708
37.5*39*115cm³

IP-71L
34*33*110cm³

Type	Bottle downloading	
Heating capacity	500W/85-95℃	
Cooling capacity	75W/10-15 ℃	90W/6-10℃
	Eletronic	Compressor
Tank volume	1/1.4 Litre	1/3 Litre
Material	ABS plastic and 0.5mm side plate	
20ft/40HQ	Pending	
OEM	LOGO/COLOR/CARTON BOX/USER MANUAL	

General Configuration

*Hot and cold
*Asbeila brand
*Compressor cooling system
*Welding SS304 tank

MOQ: 1*20ft container

ZY-D18

Model No.	ZY-D18B-RO	ZY-D18B-UF
Filter Method	PAC+CTO+RO	PAC+CTO+UF
Filter Capacity	50GPD 75GPD 100GPD	90L/Hour
Cooling Method	Compressor cooling	Compressor cooling
Heating Power	500W	500W
Cooling Power	90W	90W
Heating Capacity	5L/H	5L/H
Cooling Capacity	2.0L/H	2L/H

- 3 stage filtration
- RO membrane
- Quick change filter
- Fashion style
- Romovable drip tray
- ABS Food grade material

ZY-D28

Model No.	ZY-D28B-RO	ZY-D28B-UF
Filter Method	PAC+CTO+RO	PAC+CTO+UF
Filter Capacity	50GPD 75GPD 100GPD	90L/Hour
Cooling Method	Compressor cooling	Compressor cooling
Heating Power	500W	500W
Cooling Power	90W	90W
Heating Capacity	5L/H	5L/H
Cooling Capacity	2L/H	2L/H

ZY-D29

Model No.	ZY-D29B-RO	ZY-D29B-UF
Filter Method	PAC+CTO+RO	PAC+CTO+UF
Filter Capacity	50GPD 75GPD 100GPD	90L/Hour
Cooling Method	Compressor cooling	Compressor cooling
Heating Power	500W	500W
Cooling Power	90W	90W
Heating Capacity	5L/H	5L/H
Cooling Capacity	2L/H	2L/H

ZY-D30

Model No.	ZY-D30B-RO	ZY-D30B-UF
Filter Method	PAC+CTO+RO	PAC+CTO+UF
Filter Capacity	50GPD 75GPD 100GPD	90L/Hour
Cooling Method	Compressor cooling	Compressor cooling
Heating Power	500W	500W
Cooling Power	90W	90W
Heating Capacity	5L/H	5L/H
Cooling Capacity	2L/H	2L/H

ZY-D16

Model No.	ZY-D16B-RO	ZY-D16B-UF
Filter Method	PAC+CTO+RO	PAC+CTO+UF
Filter Capacity	50GPD、75GPD、100GPD	90L/Hour
Cooling Method	Compressor cooling	Compressor cooling
Heating Power	500W	500W
Cooling Power	90W	90W
Heating Capacity	5L/H	5L/H
Cooling Capacity	2L/H	2L/H

- 3stage filtration
- RO membrane
- Quick change filter
- Indicator display
- Water-saving technology
- Food grade material

ZY-208B

Model No.	ZY-208B-RO	ZY-208B-UF
Filter Method	PP+GAC+CTO+RO	PP+GAC+CTO+UF
Filter Capacity	50GPD、75GPD、100GPD	90L/Hour
Cooling Method	Compressor cooling	Compressor cooling
Heating Power	500W	500W
Cooling Power	90W	90W
Heating Capacity	5L/H	5L/H
Cooling Capacity	2L/H	2L/H

- 4 stage filtration
- RO membrane
- Quick change filter
- Indicator display
- Water-saving technology
- Food grade material

ZY-R0X5

Model No.	ZY-ROX5
Features:	
Filter Method	PAC+CTO+RO
Filter Capacity	90L/Hour
Cooling Method	Electric Cooling
Heating Power	2000W
Cooling Power	70W
Heating Capacity	5L/H
Cooling Capacity	0.5L/H

- 3 stage filtration
- RO membrane
- Quick change filter
- Indicator display
- Water-saving technology
- Food grade material

ZY-ROX6

Model No.	ZY-ROX6
Features:	
Filter Method	PAC+CTO+RO
Filter Capacity	50GPD
Cooling Method	Compressor cooling
Heating Power	1250W
Cooling Power	90W
Heating Capacity	5L/H
Cooling Capacity	2L/H

- 3 stage filtration
- RO membrane
- Quick change filter
- Indicator display
- Water-saving technology
- Food grade material

YL-D18B/YL-D18A

DESCRIPTION
Cooling Method:Compressor cooling/Electrical cooling
Cabinet:Bottom loading bottle
Voltage:220V/110V
Heating Power:500W
Cooling Power:90W/70W
Heating Capacity:5L/H
Cooling Capacity:2L/H /0.8L/H
Cold tank volume:1.5L /0.7L
How tank volume:1L
Hot water temperature:88-95℃
Cold water temperature:6-10℃/12-15℃

iDeal Business SOLUTIONS

YL-D29B/YL-D29A

DESCRIPTION
Cooling Method:Compressor cooling/Electrical cooling
Cabinet:Bottom loading bottle
Voltage:220V/110V
Heating Power:500W
Cooling Power:90W/70W
Heating Capacity:5L/H
Cooling Capacity:2L/H 0.8L/H
Cold tank volume:3.2/0.7L
How tank volume:1L
Hot water temperature:88-95℃
Cold water temperature:6-10℃/12-15℃

YL-D16B/YL-D16A

DESCRIPTION
Cooling Method:Compressor cooling/Electrical cooling
Cabinet:Bottom loading bottle
Voltage:220V/110V
Heating Power:500W
Cooling Power:90W/70W
Heating Capacity:5L/H
Cooling Capacity:0.8L/H
Cold tank volume:2L/H /0.7L /H
How tank volume:0.7L
Hot water temperature:88-95℃
Cold water temperature:6-10℃/12-15℃

YL-D30B/YL-D30A

DESCRIPTION
Cooling Method:Compressor cooling/Electrical cooling
Cabinet:Bottom loading bottle
Voltage:220V/110V
Heating Power:500W
Cooling Power:90W/70W
Heating Capacity:5L/H
Cooling Capacity:2L/H 0.8L/H
Cold tank volume:3.2/0.7L
How tank volume:1L
Hot water temperature:88-95℃
Cold water temperature:6-10℃/12-15℃

YL-1159AX

DESCRIPTION

Cooling Method:Electrical cooling
Cabinet:Bottom loading bottle
Voltage:220V/110V
Heating Power:500W
Cooling Power:70W
Heating Capacity:5L/H
Cooling Capacity:0.8L/H
Cold tank volume:0.7L
How tank volume:1L
Hot water temperature:88-95℃
Cold water temperature:12-15℃

YL-1128A

DESCRIPTION
Cooling Method:Electrical Cooling
Cabinet:Storage Cabinet
Voltage:220V/110V
Heating Power:500W
Cooling Power:70W
Heating Capacity:5L/H
Cooling Capacity:0.8L/H
Cold tank volume:0.7L
How tank volume:1L
Hot water temperature:88-95℃
Cold water temperature:12-15℃

YL-1169A

DESCRIPTION
Cooling Method:Electrical cooling
Cabinet:Storage Cabinet
Voltage:220V/110V
Heating Power:500W
Cooling Power:70W
Heating Capacity:5L/H
Cooling Capacity:0.8L/H
Cold tank volume:0.7L
How tank volume:1L
Hot water temperature:88-95℃
Cold water temperature:12-15℃

YL-1129A

DESCRIPTION
Cooling Method:Electrical Cooling
Cabinet:With Storage Cabinet
Voltage:220V/110V
Heating Power:500W
Cooling Power:75W
Heating Capacity:5L/H
Cooling Capacity:0.8L/H
Cold tank volume:0.8L
How tank volume:1L
Hot water temperature:88-95℃
Cold water temperature:12-15℃

YL-109A

DESCRIPTION
Cooling Method:Electrical Cooling
Cabinet:With Storage Cabinet
Voltage:220V/110V
Heating Power:500W
Cooling Power:75W
Heating Capacity:5L/H
Cooling Capacity:0.8L/H
Cold tank volume:0.8L
How tank volume:1L
Hot water temperature:88-95℃
Cold water temperature:12-15℃

YL-1092A

DESCRIPTION
Cooling Method:Electrical Cooling
Cabinet:With Storage Cabinet
Voltage:220V/110V
Heating Power:500W
Cooling Power:75W
Heating Capacity:5L/H
Cooling Capacity:0.8L/H
Cold tank volume:0.8L
How tank volume:1L
Hot water temperature:88-95℃
Cold water temperature:12-15℃

YL-V208A

DESCRIPTION
Cooling Method:Electrical Cooling
Cabinet:With Storage Cabinet
Voltage:220V/110V
Heating Power:500W
Cooling Power:75W
Heating Capacity:5L/H
Cooling Capacity:0.8L/H
Cold tank volume:0.8L
How tank volume:1L
Hot water temperature:88-95℃
Cold water temperature:12-15℃

YL-115A

DESCRIPTION
Cooling Method:Electrical Cooling
Cabinet:With Storage Cabinet
Voltage:220V/110V
Heating Power:500W
Cooling Power:70W
Heating Capacity:5L/H
Cooling Capacity:0.8L/H
Cold tank volume:0.7L
How tank volume:1L
Hot water temperature:88-95℃
Cold water temperature:12-15℃

Model:YLRS-J

Water Faucets Qty:2 or 3
Can be with POU function? YES.
Packing Dimension(cm)L*W*H:39.5*32.5*117cm

Model:YLRS-J

Water Faucets Qty:2 or 3
Can be with POU function? YES.
Packing Dimension(cm)L*W*H:39.5*32.5*117cm

Model:YLRS-A3

Water Faucets Qty: 2
Can be with POU function? YES.
Packing Dimension(cm)L*W*H:36.5*37*106cm

Model:YLRS-B

Water Faucets Qty: 2
Can be with POU function? YES.
Packing Dimension(cm)L*W*H:33*37*101cm

Model:YLRS-C

Water Faucets Qty: 2
Can be with POU function? YES.
Packing Dimension(cm)L*W*H:33*37*101cm

Model:YLRS-D

Water Faucets Qty: 2 or 3
Can be with POU function? YES.
Packing Dimension(cm)L*W*H:33*37*101cm

Model:YLRS-E

Water Faucets Qty: 2
Can be with POU function? NO.
Packing Dimension(cm)L*W*H:33*33*99cm

Model:YLRS-U

Water Faucets Qty: 2
Can be with POU function? NO.
Packing Dimension(cm)L*W*H:32*32*86cm

Model:YLRS-T

Water Faucets Qty: 2
Can be with POU function? NO.
Packing Dimension(cm)L*W*H:33*33*99cm

Model:YLRS-N

Water Faucets Qty: 2
Can be with POU function? NO.
Packing Dimension(cm)L*W*H:35*35*102cm

Model:YLRS-V

Water Faucets Qty: 2
Can be with POU function?
NO.
Packing Dimension(cm)
L*W*H:32*32*86cm

Model:YLRS-Q

Water Faucets Qty: 2
Can be with POU function?
NO.
Packing Dimension(cm)
L*W*H:32*32*86cm

GLASS WATER DISPENSER

HOT AND COLD

- New curve glass
- Compressor cooling
- High performance fridge
- Stainless steel tank
- Food grade material
- With child safety lock

- New curve glass
- Compressor cooling
- High performance fridge
- Stainless steel tank
- Food grade material
- With child safety lock

701 Black

701 Silver

702 Blue

702 Red

703 Gold

703 Red

Model No.	Colour	Description	Heating power	Cooling power	Product size	Carton size	G.W/N.W	Loading quantity
701	Black/Silver	Hot and cold	450W	100W	350x350x103mm	380x380x1050mm	20kg/18.5kg	434pcs/40HQ
702	Blue/Red	Hot and cold	450W	100W	350x350x103mm	380x380x1050mm	20kg/18.5kg	434pcs/40HQ
703	Gold/Red	Hot and cold	450W	100W	350x350x103mm	380x380x1050mm	20kg/18.5kg	434pcs/40HQ

718 Silver

718 Gold

728 White

F701 Black

F701 White

- New curve glass
- Compressor cooling
- High performance fridge
- Stainless steel tank
- Food grade material
- With child safety lock

Model No.	Colour	Description	Heating power	Cooling power	Product size	Carton size	G.W/N.W	Loading quantity
718	Silver/Gold	Hot and cold	450W	100W	350x350x103mm	380x380x1050mm	20kg/18.5kg	434pcs/40HQ
728	Black/White	Hot and cold	450W	100W	350x350x103mm	380x380x1050mm	20kg/18.5kg	434pcs/40HQ
738	–	Hot and cold	450W	100W	350x350x103mm	380x380x1050mm	20kg/18.5kg	434pcs/40HQ
F701	Black/White	Hot and cold	450W	100W	350x350x103mm	380x380x1050mm	20kg/18.5kg	434pcs/40HQ

HOT AND COLD

- Normal flat
- Compressor cooling
- High performance fridge
- Stainless steel tank
- Food grade silicon
- Child safety lock

MODEL	F738
Description	Hot and cold
Heating power :	450W
Cooling power:	100W
Product size:	350x350x103mm
Carton size:	380x380x1050mm
G.W/N.W:	20kg/18.5kg
Loading quantity:	434pcs/40HQ

F738 Silver

F738 Gold

F738 White

F738 Pink

HOT , COLD AND NORMAL

- Newly single outlet design,
- With child safety lock
- Strong ABS body
- High quality Compressor cooling
- Stainless steel water tank
- Food grade material
- With storage cabinet or fridge

MODEL	F901
Heating power :	450W
Cooling power:	100W
Product size:	310x310x960mm
Carton size:	330x340x990mm
G.W/N.W:	15kg/13kg
Loading quantity:	640pcs/40HQ

Hot,cold and normal

- Newly single outlet design,
- With child safety lock
- Strong ABS body
- High quality Compressor cooling
- Stainless steel water tank
- Food grade material
- With storage cabinet or fridge

MODEL	F901
Heating power :	450W
Cooling power:	100W
Product size:	310x310x960mm
Carton size:	330x340x990mm
G.W/N.W:	15kg/13kg
Loading quantity:	640pcs/40HQ

BLY-F902 White

F902 Black

F904 White

F904 Black

BASIC WATER DISPENSER

HOT AND COLD

- Strong ABS body
- High quality Compressor cooling
- Stainless steel water tank
- Food grade material
- With storage cabinet or fridge

Description	Hot and cold
Heating power :	450W
Cooling power :	100W
Product size :	310x310x950mm
Carton size :	330x340x990mm
G.W/N.W :	15kg/13kg
Loading quantity :	640pcs/40HQ

801 White

802 White

803 White

803 Silver

- Strong ABS body
- High quality Compressor cooling
- Stainless steel water tank
- Food grade material
- With storage cabinet or fridge

Description	Hot and cold
Heating power :	450W
Cooling power :	100W
Product size :	310x310x950mm
Carton size :	330x340x990mm
G.W/N.W :	15kg/13kg
Loading quantity :	640pcs/40HQ

816 White

806 Red

807 White

805 White

805 Blue

804 White

Water Dispenser

- ▶ Hot water
- ▶ 16 Years Leading Brand Of Drinking Water
- ▶ Cold Water
- ▶ Child Safety Lock

Model No.	PS-SLR-96B/ 96P/ 96R/ 96W		
Rated Voltage	220V~/110V~/127V~	220V~/110V~/127V~	220V~/110V~/127V~
Rated Frequency	50/60Hz	50/60Hz	50/60Hz
Cooling Method	Compressor Cooling	Compressor Cooling	Electric Cooling
Function	Hot & Cold	Hot & Cold	Hot & Cold
Heating Power	550W	550W	550W
Cooling Power	100W	90W	60W
Heating Capacity	≥90℃ 5.0L/h	≥90℃ 5.0L/h	≥90℃ 5.0L/h
Cooling Capacity	≤10℃ 2.0L/h	≤10℃ 2.0L/h	≤15℃ 0.8L/h
Cabinet	With Refrigerator	With Cabinet	With Cabinet

Product advantage

- Clean & healthy water pouring
- Hygiene and food grade water tank
- Anti-leakage water system
- Fast heating & cooling water
- High capacity compartment
- Easy maintenance

PS-SLR-98G

PS-SLR-98P

PS-SLR-98R

▶ Hot Water

▶ Cold Water

▶ 16 Years Leading Brand Of Drinking Water

▶ Child Safety Lock

▶ Food Grade Material

Model No.	PS-SLR-98G / 98P / 98R		
Rated Voltage	220V~/110V~/127V~	220V~/110V~/127V~	220V~/110V~/127V~
Rated Frequency	50/60Hz	50/60Hz	50/60Hz
Cooling Method	Compressor Cooling	Compressor Cooling	Electric Cooling
Function	Hot & Cold	Hot & Cold	Hot & Cold
Heating Power	550W	550W	550W
Cooling Power	100W	90W	60W
Heating Capacity	≥90℃ 5.0L/h	≥90℃ 5.0L/h	≥90℃ 5.0L/h
Cooling Capacity	≤10℃ 2.0L/h	≤10℃ 2.0L/h	≤15℃ 0.8L/h
Cabinet	With Refrigerator	With Cabinet	With Cabinet
N.W./G.W.	16.0/17.0 Kgs	15.0/16.0 Kgs	8.0/9.0 Kgs
Packing Size	340x320x990 mm	340x320x990 mm	340x320x990 mm
Loading Qty:	490Pcs/40HQ	490Pcs/40HQ	650Pcs/40HQ
	238Pcs/20GP	238Pcs/20GP	275Pcs/20GP

Product advantage

- Clean & healthy water pouring
- Hygiene and food grade water tank
- Anti-leakage water system
- Fast heating & cooling water
- High capacity compartment
- Easy maintenance

PS-SLR-99S

PS-SLR-99R

▶ **Hot Water**

▶ **Cold Water**

▶ **16 Years Leading Brand Of Drinking Water**

▶ **Food Grade Material**

Model No.	PS-SLR-99S / 99R		
Rated Voltage	220V~/110V~/127V~	220V~/110V~/127V~	220V~/110V~/127V~
Rated Frequency	50/60Hz	50/60Hz	50/60Hz
Cooling Method	Compressor Cooling	Compressor Cooling	Electric Cooling
Function	Hot & Cold	Hot & Cold	Hot & Cold
Heating Power	550W	550W	550W
Cooling Power	100W	90W	60W
Heating Capacity	≥90℃ 5.0L/h	≥90℃ 5.0L/h	≥90℃ 5.0L/h
Cooling Capacity	≤10℃ 2.0L/h	≤10℃ 2.0L/h	≤15℃ 0.8L/h
Cabinet	With Refrigerator	With Cabinet	With Cabinet
N.W./G.W.	16.0/17.0 Kgs	15.0/16.0 Kgs	7.0/8.0 Kgs
Packing Size	350x350x1030m	350x350x1030m	350x350x1030m
Loading Qty:	408Pcs/40HQ	408Pcs/40HQ	476Pcs/40HQ
	192Pcs/20GP	192Pcs/20GP	192Pcs/20GP

Product advantage

- Clean & healthy water pouring
- Hygiene and food grade water tank
- Anti-leakage water system
- Fast heating & cooling water
- High capacity compartment
- Easy maintenance

PS-SLR-131B

PS-SLR-131R

► **Hot Water**

► **Cold Water**

► **16 Years Leading Brand Of Drinking Water**

► **Food Grade Material**

Model No.	PS-SLR-131B / 131R		
Rated Voltage	220V~/110V~/127V~	220V~/110V~/127V~	220V~/110V~/127V~
Rated Frequency	50/60Hz	50/60Hz	50/60Hz
Cooling Method	Compressor Cooling	Compressor Cooling	Electric Cooling
Function	Hot & Cold	Hot & Cold	Hot & Cold
Heating Power	550W	550W	550W
Cooling Power	100W	90W	60W
Heating Capacity	≥90℃ 5.0L/h	≥90℃ 5.0L/h	≥90℃ 5.0L/h
Cooling Capacity	≤10℃ 2.0L/h	≤10℃ 2.0L/h	≤15℃ 0.8L/h
Cabinet	With Refrigerator	With Cabinet	With Cabinet
N.W./G.W.	17.0/18.0 Kgs	16.0/17.0 Kgs	9.0/10.0 Kgs
Packing Size	390x365x1100 mm	390x365x1100 mm	390x365x1100 mm
Loading Qty:	372Pcs/40HQ	372Pcs/40HQ	425Pcs/40HQ
	180Pcs/20GP	180Pcs/20GP	180Pcs/20GP

Product advantage

- Clean & healthy water pouring
- Hygiene and food grade water tank
- Anti-leakage water system
- Fast heating & cooling water
- High capacity compartment
- Easy maintenance

PS-SLR-152R

PS-SLR-152G

▶ **Hot Water**

▶ **Cold Water**

▶ **16 Years Leading Brand Of Drinking Water**

▶ **Child Safety Lock**

▶ **Food Grade Material**

Model No.	PS-SLR-152R / 152G		
Rated Voltage	220V~/110V~/127V~	220V~/110V~/127V~	220V~/110V~/127V~
Rated Frequency	50/60Hz	50/60Hz	50/60Hz
Cooling Method	Compressor Cooling	Compressor Cooling	Electric Cooling
Function	Hot & Cold	Hot & Cold	Hot & Cold
Heating Power	550W	550W	550W
Cooling Power	100W	90W	60W
Heating Capacity	≥90℃ 5.0L/h	≥90℃ 5.0L/h	≥90℃ 5.0L/h
Cooling Capacity	≤10℃ 2.0L/h	≤10℃ 2.0L/h	≤15℃ 0.8L/h
Cabinet	With Refrigerator	With Cabinet	With Cabinet
N.W./G.W.	18.0/19.0 Kgs	17.0/18.0 Kgs	10.0/11.0 Kgs
Packing Size	390x365x1160 mm	390x365x1160 mm	390x365x1160 mm
Loading Qty:	372Pcs/40HQ	372Pcs/40HQ	425Pcs/40HQ
	180Pcs/20GP	180Pcs/20GP	180Pcs/20GP

Product advantage

- Clean & healthy water pouring
- Hygiene and food grade water tank
- Anti-leakage water system
- Fast heating & cooling water
- High capacity compartment
- Easy maintenance

PS-SLR-109

PS-SLR-109G

PS-SLR-109B

- ▶ Hot Water
- ▶ Normal Water
- ▶ Cold Water
- ▶ 16 Years Leading Brand Of Drinking Water
- ▶ Child Safety Lock
- ▶ Food Grade Material

Model No.	PS-SLR-109 / 109G /109B	
Rated Voltage	220V~/110V~/127V~	220V~/110V~/127V~
Rated Frequency	50/60Hz	50/60Hz
Cooling Method	Compressor Cooling	Electric Cooling
Function	Hot & Normal & Cold	Hot & Normal & Cold
Heating Power	550W	550W
Cooling Power	90W	60W
Heating Capacity	≥90℃ 5.0L/h	≥90℃ 5.0L/h
Cooling Capacity	≤10℃ 2.0L/h	≤15℃ 0.8L/h
Cabinet	With Cabinet	With Cabinet
N.W./G.W.	12.0/13.0 Kgs	7.0/8.0 Kgs
Packing Size	310x280x870 mm	310x280x870 mm
Loading Qty:	912Pcs/40HQ	912Pcs/40HQ
	372Pcs/20GP	372Pcs/20GP

Product advantage

- Clean & healthy water pouring
- Hygiene and food grade water tank
- Anti-leakage water system
- Fast heating & cooling water
- High capacity compartment
- Easy maintenance

PS-SLR-106

PS-SLR-106G

PS-SLR-106B

▶ **Hot Water**

▶ **Normal Water**

▶ **Cold Water**

▶ **16 Years Leading Brand Of Drinking Water**

▶ **Food Grade Material**

Model No.	PS-SLR-106 / 106G /106B	
Rated Voltage	220V~/110V~/127V~	220V~/110V~/127V~
Rated Frequency	50/60Hz	50/60Hz
Cooling Method	Compressor Cooling	Electric Cooling
Function	Hot & Normal & Cold	Hot & Normal & Cold
Heating Power	550W	550W
Cooling Power	90W	60W
Heating Capacity	≥90℃ 5.0L/h	≥90℃ 5.0L/h
Cooling Capacity	≤10℃ 2.0L/h	≤15℃ 0.8L/h
Cabinet	With Cabinet	With Cabinet
N.W./G.W.	12.0/13.0 Kgs	7.0/8.0 Kgs
Packing Size	310x280x870 mm	310x280x870 mm
Loading Qty:	912Pcs/40HQ	912Pcs/40HQ
	372Pcs/20GP	372Pcs/20GP

Product advantage

- Clean & healthy water pouring
- Hygiene and food grade water tank
- Anti-leakage water system
- Fast heating & cooling water
- High capacity compartment
- Easy maintenance

▶ **Hot Water**

▶ **Cold Water**

▶ **16 Years Leading Brand Of Drinking Water**

▶ **Food Grade Material**

PS-SLR-105

PS-SLR-205

PS-SLR-54B

Model No.	PS-SLR-54B / 105		
Rated Voltage	220V~/110V~/127V~	220V~/110V~/127V~	220V~/110V~/127V~
Rated Frequency	50/60Hz	50/60Hz	50/60Hz
Cooling Method	Compressor Cooling	Compressor Cooling	Electric Cooling
Function	Hot & Cold	Hot & Cold	Hot & Cold
Heating Power	550W	550W	550W
Cooling Power	100W	90W	60W
Heating Capacity	≥90℃ 5.0L/h	≥90℃ 5.0L/h	≥90℃ 5.0L/h
Cooling Capacity	≤10℃ 2.0L/h	≤10℃ 2.0L/h	≤15℃ 0.8L/h
Cabinet	With Refrigerator	With Cabinet	With Cabinet
N.W./G.W.	14.0/15.0 Kgs	13.0/14.0 Kgs	7.0/8.0 Kgs
Packing Size	350x320x990 mm	350x320x990 mm	350x320x990 mm
Loading Qty:	476Pcs/40HQ	476Pcs/40HQ	625Pcs/40HQ
	224Pcs/20GP	224Pcs/20GP	256Pcs/20GP

Model No.	PS-SLR-205		
Rated Voltage	220V~/110V~/127V~	220V~/110V~/127V~	220V~/110V~/127V~
Rated Frequency	50/60Hz	50/60Hz	50/60Hz
Cooling Method	Compressor Cooling	Compressor Cooling	Electric Cooling
Function	Hot & Cold	Hot & Cold	Hot & Cold
Heating Power	550W	550W	550W
Cooling Power	100W	90W	60W
Heating Capacity	≥90℃ 5.0L/h	≥90℃ 5.0L/h	≥90℃ 5.0L/h
Cooling Capacity	≤10℃ 2.0L/h	≤10℃ 2.0L/h	≤15℃ 0.8L/h
Cabinet	With Refrigerator	With Cabinet	With Cabinet
N.W./G.W.	15.0/16.0 Kgs	14.0/15.0 Kgs	7.0/8.0 Kgs
Packing Size	370x330x1090 mm	370x330x1090 mm	370x330x1090 mm
Loading Qty:	448Pcs/40HQ	448Pcs/40HQ	505Pcs/40HQ
	224Pcs/20GP	224Pcs/20GP	256Pcs/20GP

Product advantage

- Clean & healthy water pouring
- Hygiene and food grade water tank
- Anti-leakage water system
- Fast heating & cooling water
- High capacity compartment
- Easy maintenance

PS-SLR-22R

PS-SLR-22C

PS-SLR-22B

▶ Hot Water

▶ Normal Water

▶ Cold Water

▶ 16 Years Leading Brand Of Drinking Water

▶ Child Safety Lock

▶ Food Grade Material

Model No.	PS-SLR-22R / 22B / 22C		
Rated Voltage	220V~/110V~/127V~	220V~/110V~/127V~	220V~/110V~/127V~
Rated Frequency	50/60Hz	50/60Hz	50/60Hz
Cooling Method	Compressor Cooling	Compressor Cooling	Electric Cooling
Function	Hot & Normal & Cold	Hot & Normal & Cold	Hot & Normal & Cold
Heating Power	550W	550W	550W
Cooling Power	100W	90W	60W
Heating Capacity	≥90℃ 5.0L/h	≥90℃ 5.0L/h	≥90℃ 5.0L/h
Cooling Capacity	≤10℃ 2.0L/h	≤10℃ 2.0L/h	≤15℃ 0.8L/h
Cabinet	With Refrigerator	With Cabinet	With Cabinet
N.W./G.W.	14.0/15.0 Kgs	13.0/14.0 Kgs	7.0/8.0 Kgs
Packing Size	360x320x990 mm	360x320x990 mm	360x320x990 mm
Loading Qty:	462Pcs/40HQ	462Pcs/40HQ	600Pcs/40HQ
	224Pcs/20GP	224Pcs/20GP	256Pcs/20GP

Product advantage

- Clean & healthy water pouring
- Hygiene and food grade water tank
- Anti-leakage water system
- Fast heating & cooling water
- High capacity compartment
- Easy maintenance

PS-SLR-103

PS-SLR-103S

PS-SLR-104

PS-SLR-104S

▶ **Normal Water**

▶ **Hot Water**

▶ **Cold Water**

▶ **16 Years Leading Brand Of Drinking Water**

▶ **Food Grade Material**

Model No.	PS-SLR-103 / 103S / 104 /104S		
Rated Voltage	220V~/110V~/127V~	220V~/110V~/127V~	220V~/110V~/127V~
Rated Frequency	50/60Hz	50/60Hz	50/60Hz
Cooling Method	Compressor Cooling	Compressor Cooling	Electric Cooling
Function	Hot & Normal & Cold	Hot & Normal & Cold	Hot & Normal & Cold
Heating Power	550W	550W	550W
Cooling Power	100W	90W	60W
Heating Capacity	≥90℃ 5.0L/h	≥90℃ 5.0L/h	≥90℃ 5.0L/h
Cooling Capacity	≤10℃ 2.0L/h	≤10℃ 2.0L/h	≤15℃ 0.8L/h
Cabinet	With Refrigerator	With Cabinet	With Cabinet
N.W./G.W.	14.0/15.0 Kgs	13.0/14.0 Kgs	7.0/8.0 Kgs
Packing Size	340x320x990 mm	340x320x990 mm	340x320x990 mm
Loading Qty:	490Pcs/40HQ	490Pcs/40HQ	650Pcs/40HQ
	238Pcs/20GP	238Pcs/20GP	275Pcs/20GP

Product advantage

- Clean & healthy water pouring
- Hygiene and food grade water tank
- Anti-leakage water system
- Fast heating & cooling water
- High capacity compartment
- Easy maintenance

PS-SLR-102B

PS-SLR-102W

PS-SLR-102S

▶ Hot Water

▶ Cold Water

▶ 16 Years Leading Brand Of Drinking Water

▶ Food Grade Material

Model No.	PS-SLR-102B / 102W /102S		
Rated Voltage	220V~/110V~/127V~	220V~/110V~/127V~	220V~/110V~/127V~
Rated Frequency	50/60Hz	50/60Hz	50/60Hz
Cooling Method	Compressor Cooling	Compressor Cooling	Electric Cooling
Function	Hot & Cold	Hot & Cold	Hot & Cold
Heating Power	550W	550W	550W
Cooling Power	100W	90W	60W
Heating Capacity	≥90℃ 5.0L/h	≥90℃ 5.0L/h	≥90℃ 5.0L/h
Cooling Capacity	≤10℃ 2.0L/h	≤10℃ 2.0L/h	≤15℃ 0.8L/h
Cabinet	With Refrigerator	With Cabinet	With Cabinet
N.W./G.W.	14.0/15.0 Kgs	13.0/14.0 Kgs	7.0/8.0 Kgs
Packing Size	340x320x990 mm	340x320x990 mm	340x320x990 mm
Loading Qty:	490Pcs/40HQ	490Pcs/40HQ	650Pcs/40HQ
	238Pcs/20GP	238Pcs/20GP	275Pcs/20GP

Product advantage

- Clean & healthy water pouring
- Hygiene and food grade water tank
- Anti-leakage water system
- Fast heating & cooling water
- High capacity compartment
- Easy maintenance

PS-SLR-20

PS-SLR-202

► Hot Water

► Cold Water

► 16 Years Leading Brand Of Drinking Water

► Food Grade Material

Model No.	PS-SLR-20 / 202	
Rated Voltage	220V~/110V~/127V~	220V~/110V~/127V~
Rated Frequency	50/60Hz	50/60Hz
Cooling Method	Compressor Cooling	Electric Cooling
Function	Hot & Cold	Hot & Cold
Heating Power	550W	550W
Cooling Power	90W	60W
Heating Capacity	≥90℃ 5.0L/h	≥90℃ 5.0L/h
Cooling Capacity	≤10℃ 2.0L/h	≤15℃ 0.8L/h
Cabinet	With Cabinet	With Cabinet
N.W./G.W.	12.0/13.0 Kgs	7.0/8.0 Kgs
Packing Size	310x310x870 mm	310x310x870 mm
Loading Qty:	790Pcs/40HQ	790Pcs/40HQ
	252Pcs/20GP	296Pcs/20GP

Product advantage

- Clean & healthy water pouring
- Hygiene and food grade water tank
- Anti-leakage water system
- Fast heating & cooling water
- High capacity compartment
- Easy maintenance

PS-SLR-107

PS-SLR-107G

PS-SLR-107B

▶ Hot Water

▶ Cold Water

▶ 16 Years Leading Brand Of Drinking Water

▶ Food Grade Material

Model No.	PS-SLR-107 / 107G /107B	
Rated Voltage	220V~/110V~/127V~	220V~/110V~/127V~
Rated Frequency	50/60Hz	50/60Hz
Cooling Method	Compressor Cooling	Electric Cooling
Function	Hot & Cold	Hot & Cold
Heating Power	550W	550W
Cooling Power	90W	60W
Heating Capacity	≥90℃ 5.0L/h	≥90℃ 5.0L/h
Cooling Capacity	≤10℃ 2.0L/h	≤15℃ 0.8L/h
Cabinet	With Cabinet	With Cabinet
N.W./G.W.	12.0/13.0 Kgs	7.0/8.0 Kgs
Packing Size	310x280x870 mm	310x280x870 mm
Loading Qty:	912Pcs/40HQ	912Pcs/40HQ
	372Pcs/20GP	372Pcs/20GP

Product advantage

- Clean & healthy water pouring
- Hygiene and food grade water tank
- Anti-leakage water system
- Fast heating & cooling water
- High capacity compartment
- Easy maintenance

PS-SLR-101

PS-SLR-39

▶ **Hot Water**

▶ **Cold Water**

16 years

▶ **16 Years Leading Brand Of Drinking Water**

▶ **Food Grade Material**

Model No.	PS-SLR-101 / 39		
Rated Voltage	220V~/110V~/127V~	220V~/110V~/127V~	220V~/110V~/127V~
Rated Frequency	50/60Hz	50/60Hz	50/60Hz
Cooling Method	Compressor Cooling	Compressor Cooling	Electric Cooling
Function	Hot & Cold	Hot & Cold	Hot & Cold
Heating Power	550W	550W	550W
Cooling Power	100W	90W	60W
Heating Capacity	≥90℃ 5.0L/h	≥90℃ 5.0L/h	≥90℃ 5.0L/h
Cooling Capacity	≤10℃ 2.0L/h	≤10℃ 2.0L/h	≤15℃ 0.8L/h
Cabinet	With Refrigerator	With Cabinet	With Cabinet
N.W./G.W.	14.0/15.0 Kgs	13.0/14.0 Kgs	7.0/8.0 Kgs
Packing Size	340x320x990 mm	340x320x990 mm	340x320x990 mm
Loading Qty:	490Pcs/40HQ	490Pcs/40HQ	650Pcs/40HQ
	238Pcs/20GP	238Pcs/20GP	275Pcs/20GP

Product advantage

- Clean & healthy water pouring
- Hygiene and food grade water tank
- Anti-leakage water system
- Fast heating & cooling water
- High capacity compartment
  Easy maintenance

PS-SLR-89B

PS-SLR-89

PS-SLR-89R

▶ **Normal Water**

▶ **Hot Water**

▶ **Cold Water**

▶ **16 Years Leading Brand Of Drinking Water**

▶ **Food Grade Material**

Model No.	PS-SLR-89 / 89B / 89R		
Rated Voltage	220V~/110V~/127V~	220V~/110V~/127V~	220V~/110V~/127V~
Rated Frequency	50/60Hz	50/60Hz	50/60Hz
Cooling Method	Compressor Cooling	Compressor Cooling	Electric Cooling
Function	Hot & Normal & Cold	Hot & Normal & Cold	Hot & Normal & Cold
Heating Power	550W	550W	550W
Cooling Power	100W	90W	60W
Heating Capacity	≥90℃ 5.0L/h	≥90℃ 5.0L/h	≥90℃ 5.0L/h
Cooling Capacity	≤10℃ 2.0L/h	≤10℃ 2.0L/h	≤15℃ 0.8L/h
Cabinet	With Refrigerator	With Cabinet	With Cabinet
N.W./G.W.	14.0/15.0 Kgs	13.0/14.0 Kgs	7.0/8.0 Kgs
Packing Size	350x320x990 mm	350x320x990 mm	350x320x990 mm
Loading Qty:	476Pcs/40HQ	476Pcs/40HQ	625Pcs/40HQ
	224Pcs/20GP	224Pcs/20GP	256Pcs/20GP

Product advantage

- Clean & healthy water pouring
- Hygiene and food grade water tank
- Anti-leakage water system
- Fast heating & cooling water
- High capacity compartment
  Easy maintenance

PS-SLR-37B

PS-SLR-37A

PS-SLR-37R

▶ Hot Water

▶ Cold Water

▶ 16 Years Leading Brand Of Drinking Water

▶ Food Grade Material

Model No.	PS-SLR-37B / 37A / 37R		
Rated Voltage	220V~/110V~/127V~	220V~/110V~/127V~	220V~/110V~/127V~
Rated Frequency	50/60Hz	50/60Hz	50/60Hz
Cooling Method	Compressor Cooling	Compressor Cooling	Electric Cooling
Function	Hot & Cold	Hot & Cold	Hot & Cold
Heating Power	550W	550W	550W
Cooling Power	100W	90W	60W
Heating Capacity	≥90℃ 5.0L/h	≥90℃ 5.0L/h	≥90℃ 5.0L/h
Cooling Capacity	≤10℃ 2.0L/h	≤10℃ 2.0L/h	≤15℃ 0.8L/h
Cabinet	With Refrigerator	With Cabinet	With Cabinet
N.W./G.W.	14.0/15.0 Kgs	13.0/14.0 Kgs	7.0/8.0 Kgs
Packing Size	340x320x990 mm	340x320x990 mm	340x320x990 mm
Loading Qty:	490Pcs/40HQ	490Pcs/40HQ	650Pcs/40HQ
	238Pcs/20GP	238Pcs/20GP	275Pcs/20GP

Product advantage

- Clean & healthy water pouring
- Hygiene and food grade water tank
- Anti-leakage water system
- Fast heating & cooling water
- High capacity compartment
- Easy maintenance

PS-SLR-82S

PS-SLR-82B

PS-SLR-84B

▶ Normal Water

▶ Hot Water

▶ Cold Water

▶ 16 Years Leading Brand Of Drinking Water

▶ Food Grade Material

Model No.	PS-SLR-82S / 82B / 84B		
Rated Voltage	220V~/110V~/127V~	220V~/110V~/127V~	220V~/110V~/127V~
Rated Frequency	50/60Hz	50/60Hz	50/60Hz
Cooling Method	Compressor Cooling	Compressor Cooling	Electric Cooling
Function	Hot & Normal & Cold	Hot & Normal & Cold	Hot & Normal & Cold
Heating Power	550W	550W	550W
Cooling Power	100W	90W	60W
Heating Capacity	≥90℃ 5.0L/h	≥90℃ 5.0L/h	≥90℃ 5.0L/h
Cooling Capacity	≤10℃ 2.0L/h	≤10℃ 2.0L/h	≤15℃ 0.8L/h
Cabinet	With Refrigerator	With Cabinet	With Cabinet
N.W./G.W.	14.0/15.0 Kgs	13.0/14.0 Kgs	7.0/8.0 Kgs
Packing Size	350x320x990 mm	350x320x990 mm	350x320x990 mm
Loading Qty:	476Pcs/40HQ	476Pcs/40HQ	625Pcs/40HQ
	224Pcs/20GP	224Pcs/20GP	256Pcs/20GP

Product advantage

- Clean & healthy water pouring
- Hygiene and food grade water tank
- Anti-leakage water system
- Fast heating & cooling water
- High capacity compartment
- Easy maintenance

PS-SLR-63S

PS-SLR-63

▶ **Normal Water**

▶ **Hot Water**

▶ **Cold Water**

▶ **16 Years Leading Brand Of Drinking Water**

▶ **Food Grade Material**

Model No.	PS-SLR-63 /63S		
Rated Voltage	220V~/110V~/127V~	220V~/110V~/127V~	220V~/110V~/127V~
Rated Frequency	50/60Hz	50/60Hz	50/60Hz
Cooling Method	Compressor Cooling	Compressor Cooling	Electric Cooling
Function	Hot & Normal & Cold	Hot & Normal & Cold	Hot & Normal & Cold
Heating Power	550W	550W	550W
Cooling Power	100W	90W	60W
Heating Capacity	≥90℃ 5.0L/h	≥90℃ 5.0L/h	≥90℃ 5.0L/h
Cooling Capacity	≤10℃ 2.0L/h	≤10℃ 2.0L/h	≤15℃ 0.8L/h
Cabinet	With Refrigerator	With Cabinet	With Cabinet
N.W./G.W.	14.0/15.0 Kgs	13.0/14.0 Kgs	7.0/8.0 Kgs
Packing Size	360x320x990 mm	360x320x990 mm	360x320x990 mm
Loading Qty:	462Pcs/40HQ	462Pcs/40HQ	600Pcs/40HQ
	224Pcs/20GP	224Pcs/20GP	256Pcs/20GP

Product advantage

- Clean & healthy water pouring
- Hygiene and food grade water tank
- Anti-leakage water system
- Fast heating & cooling water
- High capacity compartment
- Easy maintenance

PS-SLR-64

PS-SLR-64S

▶ **Normal Water**

▶ **Hot Water**

▶ **Cold Water**

▶ **16 Years Leading Brand Of Drinking Water**

▶ **Food Grade Material**

Model No.	PS-SLR-64 / 64S		
Rated Voltage	220V~/110V~/127V~	220V~/110V~/127V~	220V~/110V~/127V~
Rated Frequency	50/60Hz	50/60Hz	50/60Hz
Cooling Method	Compressor Cooling	Compressor Cooling	Electric Cooling
Function	Hot & Normal & Cold	Hot & Normal & Cold	Hot & Normal & Cold
Heating Power	550W	550W	550W
Cooling Power	100W	90W	60W
Heating Capacity	≥90℃ 5.0L/h	≥90℃ 5.0L/h	≥90℃ 5.0L/h
Cooling Capacity	≤10℃ 2.0L/h	≤10℃ 2.0L/h	≤15℃ 0.8L/h
Cabinet	With Refrigerator	With Cabinet	With Cabinet
N.W./G.W.	14.0/15.0 Kgs	13.0/14.0 Kgs	7.0/8.0 Kgs
Packing Size	360x320x990 mm	360x320x990 mm	360x320x990 mm
Loading Qty:	462Pcs/40HQ	462Pcs/40HQ	600Pcs/40HQ
	224Pcs/20GP	224Pcs/20GP	256Pcs/20GP

Product advantage

- Clean & healthy water pouring
- Hygiene and food grade water tank
- Anti-leakage water system
- Fast heating & cooling water
- High capacity compartment
- Easy maintenance

PS-SLR-60

PS-SLR-61

PS-SLR-61D

▶ **Normal Water**

▶ **Hot Water**

▶ **Cold Water**

▶ **16 Years Leading Brand Of Drinking Water**

▶ **Food Grade Material**

Model No.	PS-SLR-60 / 61 /61D		
Rated Voltage	220V~/110V~/127V~	220V~/110V~/127V~	220V~/110V~/127V~
Rated Frequency	50/60Hz	50/60Hz	50/60Hz
Cooling Method	Compressor Cooling	Compressor Cooling	Electric Cooling
Function	Hot & Normal & Cold	Hot & Normal & Cold	Hot & Normal & Cold
Heating Power	550W	550W	550W
Cooling Power	100W	90W	60W
Heating Capacity	≥90℃ 5.0L/h	≥90℃ 5.0L/h	≥90℃ 5.0L/h
Cooling Capacity	≤10℃ 2.0L/h	≤10℃ 2.0L/h	≤15℃ 0.8L/h
Cabinet	With Refrigerator	With Cabinet	With Cabinet
N.W./G.W.	14.0/15.0 Kgs	13.0/14.0 Kgs	7.0/8.0 Kgs
Packing Size	350x320x990 mm	350x320x990 mm	350x320x990 mm
Loading Qty:	476Pcs/40HQ	476Pcs/40HQ	625Pcs/40HQ
	224Pcs/20GP	224Pcs/20GP	256Pcs/20GP

Product advantage

- Clean & healthy water pouring
- Hygiene and food grade water tank
- Anti-leakage water system
- Fast heating & cooling water
- High capacity compartment
- Easy maintenance

PS-SLR-51D

PS-SLR-51

▶ **Normal Water**

▶ **Hot Water**

▶ **Cold Water**

▶ **16 Years Leading Brand Of Drinking Water**

▶ **Food Grade Material**

Model No.	PS-SLR-51 / 51D		
Rated Voltage	220V~/110V~/127V~	220V~/110V~/127V~	220V~/110V~/127V~
Rated Frequency	50/60Hz	50/60Hz	50/60Hz
Cooling Method	Compressor Cooling	Compressor Cooling	Electric Cooling
Function	Hot & Normal & Cold	Hot & Normal & Cold	Hot & Normal & Cold
Heating Power	550W	550W	550W
Cooling Power	100W	90W	60W
Heating Capacity	≥90℃ 5.0L/h	≥90℃ 5.0L/h	≥90℃ 5.0L/h
Cooling Capacity	≤10℃ 2.0L/h	≤10℃ 2.0L/h	≤15℃ 0.8L/h
Cabinet	With Refrigerator	With Cabinet	With Cabinet
N.W./G.W.	14.0/15.0 Kgs	13.0/14.0 Kgs	7.0/8.0 Kgs
Packing Size	350x320x990 mm	350x320x990 mm	350x320x990 mm
Loading Qty:	476Pcs/40HQ	476Pcs/40HQ	625Pcs/40HQ
	224Pcs/20GP	224Pcs/20GP	256Pcs/20GP

Bottled Loading Water Dispenser

Product advantage

- Clean & healthy water pouring
- Hygiene and food grade water tank
- Anti-leakage water system
- Fast heating & cooling water
- Easy maintenance

▶ Hot water

▶ Normal Water

▶ Cold Water

16 years

▶ 16 Years Leading Brand Of Drinking Water

▶ Food Grade Material

Product advantage

- Clean & healthy water pouring
- Hygiene and food grade water tank
- Anti-leakage water system
- Fast heating & cooling water
- Easy maintenance

PS-SLR-812B

PS-SLR-812

PS-SLR-813

▶ **Hot Water**

▶ **Normal Water**

▶ **Cold Water**

▶ **16 Years Leading Brand Of Drinking Water**

▶ **Child Safety Lock**

▶ **Food Grade Material**

Model No.	PS-SLR-812B / 812 / 813
Rated Voltage	220V~/110V~/127V~
Rated Frequency	50/60Hz
Cooling Method	Compressor Cooling
Function	Hot & Normal & Cold
Heating Power	550W
Cooling Power	90W
Heating Capacity	≥90℃ 5.0L/h
Cooling Capacity	≤10℃ 2.0L/h
Cabinet	Bottled Loading
N.W./G.W.	14.0/15.0 Kgs
Packing Size	390x365x1100 mm
Loading Qty:	372Pcs/40HQ
	180Pcs/20GP

Product advantage

- Clean & healthy water pouring
- Hygiene and food grade water tank
- Anti-leakage water system
- Fast heating & cooling water
- Easy maintenance

PS-SLR-912B

PS-SLR-912

▶ **Hot Water**

▶ **Normal Water**

▶ **Cold Water**

▶ **16 Years Leading Brand Of Drinking Water**

▶ **Child Safety Lock**

▶ **Food Grade Material**

Model No.	PS-SLR-912B / 912
Rated Voltage	220V~/110V~/127V~
Rated Frequency	50/60Hz
Cooling Method	Compressor Cooling
Function	Hot & Normal & Cold
Heating Power	550W
Cooling Power	90W
Heating Capacity	≥90℃ 5.0L/h
Cooling Capacity	≤10℃ 2.0L/h
Cabinet	Bottled Loading
N.W./G.W.	14.0/15.0 Kgs
Packing Size	390x365x1100 mm
Loading Qty:	372Pcs/40HQ
	180Pcs/20GP

POU/RO Water Dispenser

Product Advantage

- Luxury design RO system water dispenser
- High quality PE pipe,Safety drink
- Connect water pipeline water
- Five stage water filter
- Automatic wash protect RO memebrane
- Children-safe faucet (optional)
- Suit for hotel,family use
- Easy to change filter

- Hot water
- Cold Water
- 16 Years Leading Brand Of Drinking Water
- Food Grade Material

Product advantage

- Clean & healthy water pouring
- Hygiene and food grade water tank
- Anti-leakage water system
- Fast heating & cooling water
- High capacity compartment
- Easy maintenance

PS-RO-151

PS-RO-161

▶ **Hot Water**

▶ **Cold Water**

▶ **16 Years Leading Brand Of Drinking Water**

▶ **Child Safety Lock**

▶ **Food Grade Material**

Model No.	PS-RO-151/161	
Rated Voltage	220V~/110V~/127V~	220V~/110V~/127V~
Rated Frequency	50/60Hz	50/60Hz
Cooling Method	Compressor Cooling	Electric Cooling
Function	550W	550W
Heating Power	90W	60W
Cooling Power	≥90℃ 5.0L/h	≥90℃ 5.0L/h
Heating Capacity	≤10℃ 2.0L/h	10℃ -15℃ 0.8L/h
Cooling Capacity	PP-CTO-UDF-RO-T33	PP-CTO-UDF-RO-T33
Cabinet	≥90℃ 5.0L/h	Tap Water
N.W./G.W.	≤10℃ 2.0L/h	0.1-0.5MPa
Packing Size	PP-CTO-UDF-RO-T33	3.2 Gallon
Loading Qty:	150-800ml/min	150-800ml/min
	440x430x1240 mm	440x430x1240 mm
	270Pcs/40HQ	270Pcs/40HQ
	65Pcs/20GP	65Pcs/20GP

Product advantage

- Clean & healthy water pouring
- Hygiene and food grade water tank
- Anti-leakage water system
- Fast heating & cooling water
- High capacity compartment
- Easy maintenance

PS-RO-101

PS-RO-102

▶ **Hot Water**

▶ **Cold Water**

▶ **16 Years Leading Brand Of Drinking Water**

▶ **Food Grade Material**

Model No.	PS-RO-101/102	
Rated Voltage	220V~/110V~/127V~	220V~/110V~/127V~
Rated Frequency	50/60Hz	50/60Hz
Cooling Method	Compressor Cooling	Electric Cooling
Function	550W	550W
Heating Power	90W	60W
Cooling Power	≥90℃ 5.0L/h	≥90℃ 5.0L/h
Heating Capacity	≤10℃ 2.0L/h	10℃ -15℃ 0.8L/h
Cooling Capacity	PP-CTO-UDF-RO-T33	PP-CTO-UDF-RO-T33
Cabinet	Tap Water	Tap Water
N.W./G.W.	0.1-0.5MPa	0.1-0.5MPa
Packing Size	3.2 Gallon	3.2 Gallon
Loading Qty:	150-800ml/min	150-800ml/min
	340x320x990 mm	340x320x990 mm
	490Pcs/40HQ	650Pcs/40HQ
	238Pcs/20GP	275Pcs/20GP

Model :	AFK-202		
Description :	Cold & Hot Compressor cooling With storage cabinet		
Heating Power :	550W		
Heating Capacity :	5.0L/H ,85-95℃		
Rated voltage/frequency :	110-127V~/220-240V~ 50/60Hz		
Packing size :	330*340*980mm		
Cooling Method :	Electric	Compressor	Compressor
Cabinet :	normal	normal	refrigerator
Cooling Capacity :	0.8L/h 10-15℃	1.5L/h 5-10℃	1.5L/h 5-10℃
N.W/G.W :	7.5/8.5kgs	17/18kgs	18/19kgs
Loading Quantity :	20'FT	235pcS	
	40'HC	640pcs	

- Ultra hygienic safe & durable material
- Stylish & attractive appearance design
- Using plastic with bacterium-resistance function
- Stainless steel for cold and hot tank
- Adjustable temperature control through thermostat
- High efficiency compressor cooling
- Double safety protection against low water lever
- Large storage cabinet/refrigerator

Model :	AFK-201		
Description :	Cold & Hot Compressor cooling With storage cabinet		
Heating Power :	550W		
Heating Capacity :	5.0L/H ,85-95℃		
Rated voltage/frequency :	110-127V~/220-240V~ 50/60Hz		
Packing size :	330*340*980mm		
Cooling Method :	Electric	Compressor	Compressor
Cooling power :	75W	85W	90W
Cabinet :	normal	normal	refrigerator
Cooling Capacity :	0.8L/h 10-15℃	1.5L/h 5-10℃	1.5L/h 5-10℃
N.W/G.W :	7.5/8.5kgs	17/18kgs	18/19kgs
Loading Quantity :	20'FT	235pcS	
	40'HC	640pcs	

- Ultra hygienic safe & durable material
- Stylish & attractive appearance design
- Using plastic with bacterium-resistance function
- Stainless steel for cold and hot tank
- Adjustable temperature control through thermostat
- High efficiency compressor cooling
- Double safety protection against low water lever
- Large storage cabinet/refrigerator

Model :	AFK-1026		
Description :	Cold & Hot Compressor cooling With storage cabinet		
Heating Power :	550W		
Heating Capacity :	5.0L/H ,85-95℃		
Rated voltage/frequency :	110-127V~/220-240V~ 50/60Hz		
Packing size :	330*340*980mm		
Cooling Method :	Electric	Compressor	Compressor
Cooling power :	75W	85W	90W
Cabinet :	normal	normal	refrigerator
Cooling Capacity :	0.8L/h 10-15℃	1.5L/h 5-10℃	1.5L/h 5-10℃
N.W/G.W :	7.5/8.5kgs	17/18kgs	18/19kgs
Loading Quantity :	20'FT	235pcS	
	40'HC	640pcs	

Product advantage

- Clean & healthy water pouring
- Hygiene and food grade water tank
- Anti-leakage water system
- Fast heating & cooling water
- High capacity compartment
- Easy maintenance

PS-SLR-18

PS-SLR-18D

▶ **Normal Water**

▶ **Hot Water**

▶ **Cold Water**

▶ **16 Years Leading Brand Of Drinking Water**

▶ **Food Grade Material**

Model No.	PS-SLR-18 / 18D		
Rated Voltage	220V~/110V~/127V~	220V~/110V~/127V~	220V~/110V~/127V~
Rated Frequency	50/60Hz	50/60Hz	50/60Hz
Cooling Method	Compressor Cooling	Compressor Cooling	Electric Cooling
Function	Hot & Normal & Cold	Hot & Normal & Cold	Hot & Normal & Cold
Heating Power	550W	550W	550W
Cooling Power	100W	90W	60W
Heating Capacity	≥90℃ 5.0L/h	≥90℃ 5.0L/h	≥90℃ 5.0L/h
Cooling Capacity	≤10℃ 2.0L/h	≤10℃ 2.0L/h	≤15℃ 0.8L/h
Cabinet	With Refrigerator	With Cabinet	With Cabinet
N.W./G.W.	14.0/15.0 Kgs	13.0/14.0 Kgs	7.0/8.0 Kgs
Packing Size	350x320x990 mm	350x320x990 mm	350x320x990 mm
Loading Qty:	476Pcs/40HQ	476Pcs/40HQ	625Pcs/40HQ
	224Pcs/20GP	224Pcs/20GP	256Pcs/20GP

- Ultra hygienic safe & durable material
- Stylish & attractive appearance design
- Using plastic with bacterium-resistance function
- Stainless steel for cold and hot tank
- Adjustable temperature control through thermostat
- High efficiency compressor cooling
- Double safety protection against low water lever
- Large storage cabinet/refrigerator

Model :	AFK-1416		
Description :	Cold & Hot Compressor cooling With storage cabinet		
Heating Power :	550W		
Heating Capacity :	5.0L/H ,85-95℃		
Rated voltage/frequency :	110-127V~/220-240V~ 50/60Hz		
Packing size :	330*340*980mm		
Cooling Method :	Electric	Compressor	Compressor
Cooling power :	75W	85W	90W
Cabinet :	normal	normal	refrigerator
Cooling Capacity :	0.8L/h 10-15℃	1.5L/h 5-10℃	1.5L/h 5-10℃
N.W/G.W :	7.5/8.5kgs	17/18kgs	18/19kgs
Loading Quantity :	20'FT	235pcS	
	40'HC	640pcs	

- Ultra hygienic safe & durable material
- Stylish & attractive appearance design
- Using plastic with bacterium-resistance function
- Stainless steel for cold and hot tank
- Adjustable temperature control through thermostat
- High efficiency compressor cooling
- Double safety protection against low water lever
- Large storage cabinet/refrigerator

Model :	AFK-1025		
Description :	Cold & Hot Compressor cooling With storage cabinet		
Heating Power :	550W		
Heating Capacity :	5.0L/H ,85-95°C		
Rated voltage/frequency :	110-127V~/220-240V~ 50/60Hz		
Packing size :	330*340*980mm		
Cooling Method :	Electric	Compressor	Compressor
Cooling power :	75W	85W	90W
Cabinet :	normal	normal	refrigerator
Cooling Capacity :	0.8L/h 10-15°C	1.5L/h 5-10°C	1.5L/h 5-10°C
N.W/G.W :	7.5/8.5kgs	17/18kgs	18/19kgs
Loading Quantity :	20'FT	235pcS	
	40'HC	640pcs	

- Ultra hygienic safe & durable material
- Stylish & attractive appearance design
- Using plastic with bacterium-resistance function
- Stainless steel for cold and hot tank
- Adjustable temperature control through thermostat
- High efficiency compressor cooling
- Double safety protection against low water lever
- Large storage cabinet/refrigerator

Model :	AFK-1512		
Description :	Cold & Hot Compressor cooling With storage cabinet		
Heating Power :	550W		
Heating Capacity :	5.0L/H ,85-95℃		
Rated voltage/frequency :	110-127V~/220-240V~ 50/60Hz		
Packing size :	330*340*980mm		
Cooling Method :	Electric	Compressor	Compressor
Cooling power :	75W	85W	90W
Cabinet :	normal	normal	refrigerator
Cooling Capacity :	0.8L/h 10-15℃	1.5L/h 5-10℃	1.5L/h 5-10℃
N.W/G.W :	7.5/8.5kgs	17/18kgs	18/19kgs
Loading Quantity :	20'FT	235pcS	
	40'HC	640pcs	

- Ultra hygienic safe & durable material
- Stylish & attractive appearance design
- Using plastic with bacterium-resistance function
- Stainless steel for cold and hot tank
- Adjustable temperature control through thermostat
- High efficiency compressor cooling
- Double safety protection against low water lever
- Large storage cabinet/refrigerator

Model :	AFK-1513(Spray Paint)		
Description :	Cold & Hot Compressor cooling With storage cabinet		
Heating Power :	550W		
Heating Capacity :	5.0L/H ,85-95℃		
Rated voltage/frequency :	110-127V~/220-240V~ 50/60Hz		
Packing size :	330*340*980mm		
Cooling Method :	Electric	Compressor	Compressor
Cooling power :	75W	85W	90W
Cabinet :	normal	normal	refrigerator
Cooling Capacity :	0.8L/h 10-15℃	1.5L/h 5-10℃	1.5L/h 5-10℃
N.W/G.W :	7.5/8.5kgs	17/18kgs	18/19kgs
Loading Quantity :	20'FT	235pcS	
	40'HC	640pcs	

- Ultra hygienic safe & durable material
- Stylish & attractive appearance design
- Using plastic with bacterium-resistance function
- Stainless steel for cold and hot tank
- Adjustable temperature control through thermostat
- High efficiency compressor cooling
- Double safety protection against low water lever
- Large storage cabinet/refrigerator

Model :	AFK-1024		
Description :	Cold & Hot Compressor cooling With storage cabinet		
Heating Power :	550W		
Heating Capacity :	5.0L/H ,85-95℃		
Rated voltage/frequency :	110-127V~/220-240V~ 50/60Hz		
Packing size :	330*340*980mm		
Cooling Method :	Electric	Compressor	Compressor
Cooling power :	75W	85W	90W
Cabinet :	normal	normal	refrigerator
Cooling Capacity :	0.8L/h 10-15℃	1.5L/h 5-10℃	1.5L/h 5-10℃
N.W/G.W :	7.5/8.5kgs	17/18kgs	18/19kgs
Loading Quantity :	20'FT	235pcS	
	40'HC	640pcs	

- Ultra hygienic safe & durable material
- Stylish & attractive appearance design
- Using plastic with bacterium-resistance function
- Stainless steel for cold and hot tank
- Adjustable temperature control through thermostat
- High efficiency compressor cooling
- Double safety protection against low water lever
- Large storage cabinet/refrigerator

Model :	AFK-1022		
Description:	Cold & Hot Compressor cooling With storage cabinet		
Heating Power :	550W		
Heating Capacity :	5.0L/H ,85-95℃		
Rated voltage/frequency :	110-127V~/220-240V~ 50/60Hz		
Packing size :	330*340*980mm		
Cooling Method :	Electric	Compressor	Compressor
Cooling power :	75W	85W	90W
Cabinet :	normal	normal	refrigerator
Cooling Capacity :	0.6L/h 10-15℃	1.5L/h 5-10℃	1.5L/h 5-10℃
N.W/G.W :	7.5/8.5kgs	17/18kgs	18/19kgs
Loading Quantity :	20'FT	235pcS	
	40'HC	640pcs	

- Ultra hygienic safe & durable material
- Stylish & attractive appearance design
- Using plastic with bacterium-resistance function
- Stainless steel for cold and hot tank
- Adjustable temperature control through thermostat
- High efficiency compressor cooling
- Double safety protection against low water lever
- Large storage cabinet/refrigerator

Model :	AFK-1036		
Description :	Cold & Hot Compressor cooling With storage cabinet		
Heating Power :	550W		
Heating Capacity :	5.0L/H ,85-95℃		
Rated voltage/frequency :	110-127V~/220-240V~ 50/60Hz		
Packing size :	330*340*980mm		
Cooling Method :	Electric	Compressor	Compressor
Cooling power :	75W	85W	90W
Cabinet :	normal	normal	refrigerator
Cooling Capacity :	0.8L/h 10-15℃	1.5L/h 5-10℃	1.5L/h 5-10℃
N.W/G.W :	7.5/8.5kgs	17/18kgs	18/19kgs
Loading Quantity :	20'FT	235pcS	
	40'HC	640pcs	

- Ultra hygienic safe & durable material
- Stylish & attractive appearance design
- Using plastic with bacterium-resistance function
- Stainless steel for cold and hot tank
- Adjustable temperature control through thermostat
- High efficiency compressor cooling
- Double safety protection against low water lever
- Large storage cabinet/refrigerator

Model :	AFK-1412		
Description :	Cold & Hot Compressor cooling With storage cabinet		
Heating Power :	550W		
Heating Capacity :	5.0L/H ,85-95℃		
Rated voltage/frequency :	110-127V~/220-240V~ 50/60Hz		
Packing size :	330*340*980mm		
Cooling Method :	Electric	Compressor	Compressor
Cooling power :	75W	85W	90W
Cabinet :	normal	normal	refrigerator
Cooling Capacity :	0.8L/h 10-15℃	1.5L/h 5-10℃	1.5L/h 5-10℃
N.W/G.W :	7.5/8.5kgs	17/18kgs	18/19kgs
Loading Quantity :	20'FT	235pcS	
	40'HC	640pcs	

- Ultra hygienic safe & durable material
- Stylish & attractive appearance design
- Using plastic with bacterium-resistance function
- Stainless steel for cold and hot tank
- Adjustable temperature control through thermostat
- High efficiency compressor cooling
- Double safety protection against low water lever
- Large storage cabinet/refrigerator

Model :	AFK-1411		
Description :	Cold & Hot Compressor cooling With storage cabinet		
Heating Power :	550W		
Heating Capacity :	5.0L/H ,85-95℃		
Rated voltage/frequency :	110-127V~/220-240V~ 50/60Hz		
Packing size :	330*340*980mm		
Cooling Method :	Electric	Compressor	Compressor
Cooling power :	75W	85W	90W
Cabinet :	normal	normal	refrigerator
Cooling Capacity :	0.8L/h 10-15℃	1.5L/h 5-10℃	1.5L/h 5-10℃
N.W/G.W :	7.5/8.5kgs	17/18kgs	18/19kgs
Loading Quantity :	20'FT	235pcS	
	40'HC	640pcs	

- Ultra hygienic safe & durable material
- Stylish & attractive appearance design
- Using plastic with bacterium-resistance function
- Stainless steel for cold and hot tank
- Adjustable temperature control through thermostat
- High efficiency compressor cooling
- Double safety protection against low water lever
- Large storage cabinet/refrigerator

Model :	AFK-1526		
Description :	Cold & Hot Compressor cooling With storage cabinet		
Heating Power :	550W		
Heating Capacity :	5.0L/H ,85-95℃		
Rated voltage/frequency :	110-127V~/220-240V~ 50/60Hz		
Packing size :	330*340*980mm		
Cooling Method :	Electric	Compressor	Compressor
Cooling power :	75W	85W	90W
Cabinet :	normal	normal	refrigerator
Cooling Capacity :	0.8L/h 10-15℃	1.5L/h 5-10℃	1.5L/h 5-10℃
N.W/G.W :	7.5/8.5kgs	17/18kgs	18/19kgs
Loading Quantity :	20'FT	235pcS	
	40'HC	640pcs	

- Ultra hygienic safe & durable material
- Stylish & attractive appearance design
- Using plastic with bacterium-resistance function
- Stainless steel for cold and hot tank
- Adjustable temperature control through thermostat
- High efficiency compressor cooling
- Double safety protection against low water lever
- Large storage cabinet/refrigerator

Model :	AFK-1413		
Description :	Cold & Hot Compressor cooling With storage cabinet		
Heating Power :	550W		
Heating Capacity :	5.0L/H ,85-95℃		
Rated voltage/frequency :	110-127V~/220-240V~ 50/60Hz		
Packing size :	330*340*980mm		
Cooling Method :	Electric	Compressor	Compressor
Cooling power :	75W	85W	90W
Cabinet :	normal	normal	refrigerator
Cooling Capacity :	0.8L/h 10-15℃	1.5L/h 5-10℃	1.5L/h 5-10℃
N.W/G.W :	7.5/8.5kgs	17/18kgs	18/19kgs
Loading Quantity :	20'FT	235pcS	
	40'HC	640pcs	

- Ultra hygienic safe & durable material
- Stylish & attractive appearance design
- Using plastic with bacterium-resistance function
- Stainless steel for cold and hot tank
- Adjustable temperature control through thermostat
- High efficiency compressor cooling
- Double safety protection against low water lever
- Large storage cabinet/refrigerator

Model :	AFK-1188		
Description:	Cold & Hot Compressor cooling With storage cabinet		
Heating Power :	550W		
Heating Capacity :	5.0L/H ,85-95℃		
Rated voltage/frequency :	110-127V~/220-240V~ 50/60Hz		
Packing size :	340*340*1020mm		
Cooling Method :	Electric	Compressor	Compressor
Cooling power :	75W	85W	90W
Cabinet :	normal	normal	refrigerator
Cooling Capacity :	0.8L/h 10-15℃	1.5L/h 5-10℃	1.5L/h 5-10℃
N.W/G.W :	7.5/8.5kgs	17/18kgs	18/19kgs
Loading Quantity :	20'FT	210pcS	
	40'HC	620pcs	

- Ultra hygienic safe & durable material
- Stylish & attractive appearance design
- Using plastic with bacterium-resistance function
- Stainless steel for cold and hot tank
- Adjustable temperature control through thermostat
- High efficiency compressor cooling
- Double safety protection against low water lever
- Large storage cabinet/refrigerator

Model :	AFK-1166		
Description :	Cold & Hot Compressor cooling With storage cabinet		
Heating Power :	550W		
Heating Capacity :	5.0L/H ,85-95℃		
Rated voltage/frequency :	110-127V~/220-240V~ 50/60Hz		
Packing size :	340*340*1020mm		
Cooling Method :	Electric	Compressor	Compressor
Cooling power :	75W	85W	90W
Cabinet :	normal	normal	refrigerator
Cooling Capacity :	0.8L/h 10-15℃	1.5L/h 5-10℃	1.5L/h 5-10℃
N.W/G.W :	7.5/8.5kgs	17/18kgs	18/19kgs
Loading Quantity :	20'FT	210pcS	
	40'HC	620pcs	

- Ultra hygienic safe & durable material
- Stylish & attractive appearance design
- Using plastic with bacterium-resistance function
- Stainless steel for cold and hot tank
- Adjustable temperature control through thermostat
- High efficiency compressor cooling
- Double safety protection against low water lever
- Large storage cabinet/refrigerator

Model :	AFK-1176		
Description :	Cold & Hot Compressor cooling With storage cabinet		
Heating Power :	550W		
Heating Capacity :	5.0L/H ,85-95℃		
Rated voltage/frequency :	110-127V~/220-240V~ 50/60Hz		
Packing size :	340*340*1020mm		
Cooling Method :	Electric	Compressor	Compressor
Cooling power :	75W	85W	90W
Cabinet :	normal	normal	refrigerator
Cooling Capacity :	0.8L/h 10-15℃	1.5L/h 5-10℃	1.5L/h 5-10℃
N.W/G.W :	7.5/8.5kgs	17/18kgs	18/19kgs
Loading Quantity :	20'FT	210pcS	
	40'HC	620pcs	

- Ultra hygienic safe & durable material
- Stylish & attractive appearance design
- Using plastic with bacterium-resistance function
- Stainless steel for cold and hot tank
- Adjustable temperature control through thermostat
- High efficiency compressor cooling
- Double safety protection against low water lever
- Large storage cabinet/refrigerator

Model :	AFK-1199		
Description:	Cold & Hot Compressor cooling With storage cabinet		
Heating Power :	550W		
Heating Capacity :	5.0L/H ,85-95℃		
Rated voltage/frequency :	110-127V~/220-240V~ 50/60Hz		
Packing size :	340*340*1020mm		
Cooling Method :	Electric	Compressor	Compressor
Cooling power :	75W	85W	90W
Cabinet :	normal	normal	refrigerator
Cooling Capacity :	0.8L/h 10-15℃	1.5L/h 5-10℃	1.5L/h 5-10℃
N.W/G.W :	7.5/8.5kgs	17/18kgs	18/19kgs
Loading Quantity :	20'FT	210pcS	
	40'HC	620pcs	

- Ultra hygienic safe & durable material
- Stylish & attractive appearance design
- Using plastic with bacterium-resistance function
- Stainless steel for cold and hot tank
- Adjustable temperature control through thermostat
- High efficiency compressor cooling
- Double safety protection against low water lever
- Large storage cabinet/refrigerator

Model :	AFK-1688		
Description :	Cold & Hot Compressor cooling With storage cabinet		
Heating Power :	550W		
Heating Capacity :	5.0L/H ,85-95℃		
Rated voltage/frequency :	110-127V~/220-240V~ 50/60Hz		
Packing size :	390*380*1150mm		
Cooling Method :	Electric	Compressor	Compressor
Cooling power :	75W	85W	90W
Cabinet :	normal	normal	refrigerator
Cooling Capacity :	0.8L/h 10-15℃	1.5L/h 5-10℃	1.5L/h 5-10℃
N.W/G.W :	7.5/8.5kgs	17/18kgs	18/19kgs
Loading Quantity :	20'FT	200pcS	
	40'HC	600pcs	

- Ultra hygienic safe & durable material
- Stylish & attractive appearance design
- Using plastic with bacterium-resistance function
- Stainless steel for cold and hot tank
- Adjustable temperature control through thermostat
- High efficiency compressor cooling
- Double safety protection against low water lever
- Large storage cabinet/refrigerator

Model :	AFK-1166（wood grain)		
Description :	Cold & Hot Compressor cooling With storage cabinet		
Heating Power :	550W		
Heating Capacity :	5.0L/H ,85-95℃		
Rated voltage/frequency :	110-127V~/220-240V~ 50/60Hz		
Packing size :	350*350*1020mm		
Cooling Method :	Electric	Compressor	Compressor
Cooling power :	75W	85W	90W
Cabinet :	normal	normal	refrigerator
Cooling Capacity :	0.8L/h 10-15℃	1.5L/h 5-10℃	1.5L/h 5-10℃
N.W/G.W :	7.5/8.5kgs	17/18kgs	18/19kgs
Loading Quantity :	20'FT	210pcS	
	40'HC	620pcs	

MODEL:16L

Environmental protection products | child lock | refrigeration | heating | Barreled water (selection) | Refrigerating function (selection) | Direct drinking water(selection)

Product parameters

Model:	16L
Rated voltage:	220V ~
Rated frequency:	50HZ
Rated total power:	590W
Thermal power:	500W
Refrigeration power:	90W
Power consumption:	1.5KW.h/24h
Anti electric protection type:	I class
Use of ambient temperature:	10 ~ 32℃
Water heating capacity:	≥90℃ 5L/h
Water cooling capacity:	≤10℃ 2L/h
Shape size:	310X320X960mm

MODEL:16L/E

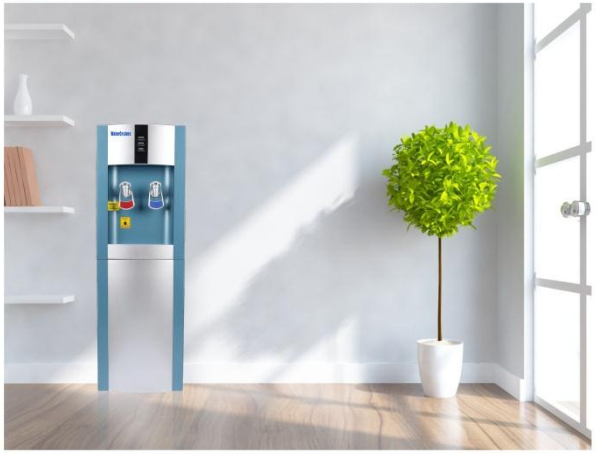

Environmental protection products | refrigeration | heating | Barreled water (selection) | Refrigerating function (selection) | Direct drinking water(selection)

Product parameters

Model:	16L/E
Rated voltage:	220V ~
Rated frequency:	50HZ
Rated total power:	590W
Thermal power:	500W
Refrigeration power:	90W
Power consumption:	1.5KW.h/24h
Anti electric protection type:	I class
Use of ambient temperature:	10 ~ 32℃
Water heating capacity:	≥90℃ 5L/h
Water cooling capacity:	≤10℃ 2L/h
Shape size:	310X320X960mm

MODEL:105L/H

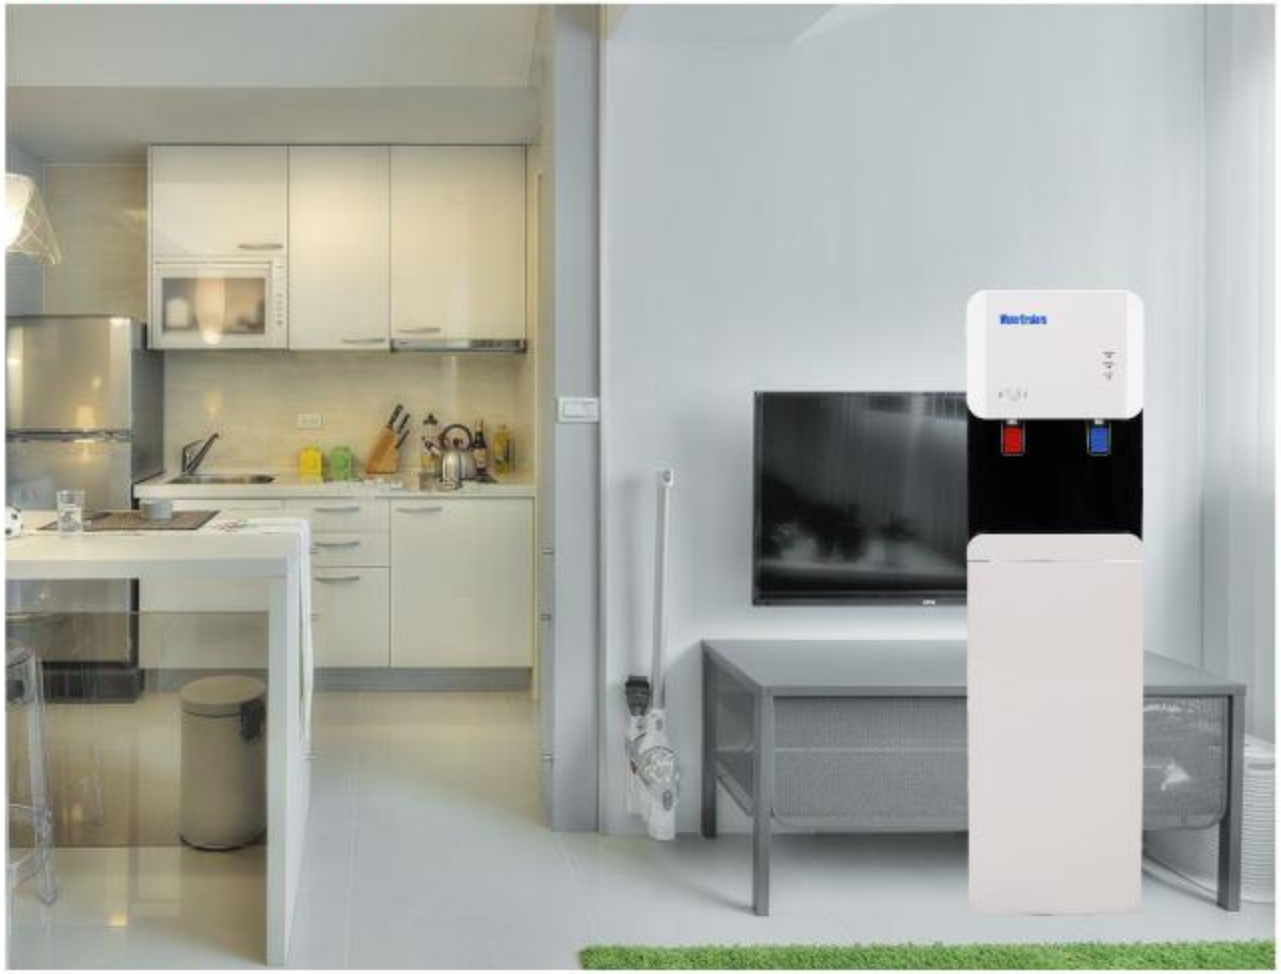

Environmental protection products

child lock

refrigeration

heating

Barreled water (selection)

Refrigerating function (selection)

Direct drinking water(selection)

Environmental protection products | child lock | refrigeration | heating | Barreled water (selection) | Refrigerating function (selection) | Direct drinking water(selection)

Product parameters

Model:	105L/H
Rated voltage:	220V ~
Rated frequency:	50HZ
Rated total power:	590W
Thermal power:	500W
Refrigeration power:	90W
Power consumption:	1.5KW.h/24h
Anti electric protection type:	I class
Use of ambient temperature:	10 ~ 32℃
Water heating capacity:	≥90℃ 5L/h
Water cooling capacity:	≤10℃ 2L/h
Shape size:	310X340X1100mm

Product parameters

Model:	105L
Rated voltage:	220V ~
Rated frequency:	50HZ
Rated total power:	590W
Thermal power:	500W
Refrigeration power:	90W
Power consumption:	1.5KW.h/24h
Anti electric protection type:	I class
Use of ambient temperature:	10 ~ 32℃
Water heating capacity:	≥90℃ 5L/h
Water cooling capacity:	≤10℃ 2L/h
Shape size:	310X340X960mm

Environmental protection products

child lock

refrigeration

heating

Four stage filter

Direct drinking water(selection)

Product parameters

Model:	105L-XGJ
Rated voltage:	220V ~
Rated frequency:	50HZ
Rated total power:	590W
Thermal power:	500W
Refrigeration power:	90W
Power consumption:	1.5KW.h/24h
Anti electric protection type:	I class
Use of ambient temperature:	10 ~ 32℃
Water heating capacity:	≥90℃ 5L/h
Water cooling capacity:	≤10℃ 2L/h
Shape size:	310X340X1100mm

Product parameters

Model:	16L/HL
Rated voltage:	220V ~
Rated frequency:	50HZ
Rated total power:	590W
Thermal power:	500W
Refrigeration power:	90W
Power consumption:	1.5KW.h/24h
Anti electric protection type:	I class
Use of ambient temperature:	10 ~ 32℃
Water heating capacity:	≥90℃ 5L/h
Water cooling capacity:	≤10℃ 2L/h
Shape size:	310X320X960mm

Product parameters

Model:	16L
Rated voltage:	220V ~
Rated frequency:	50HZ
Rated total power:	590W
Thermal power:	500W
Refrigeration power:	90W
Power consumption:	1.5KW.h/24h
Anti electric protection type:	I class
Use of ambient temperature:	10 ~ 32℃
Water heating capacity:	≥90℃ 5L/h
Water cooling capacity:	≤10℃ 2L/h
Shape size:	310X320X960mm

PT-1401

1. Hot & room temperature& cold water
2. Stainless steel water tank (SUS304)
3. High efficiency compressor cooling
4. With Storage cabinet or refrigerator
5. Hot water capacity: heating L/h (≥90℃) 500W 5L
6. Cold water capacity: cooling L/h (≤10℃) 85W 2L
7. Paper cup storage column
8. Safety lock for hot water
9. Unit dimension & weight（mm） 310*340*1035

PT-1402

1. Hot & room temperature& cold water
2. Stainless steel water tank (SUS304)
3. High efficiency compressor cooling
4. With Storage cabinet or refrigerator
5. Hot water capacity: heating L/h (≥90℃) 500W 5L
6. Cold water capacity: cooling L/h (≤10℃) 85W 2L
7. Paper cup storage column
8. Safety lock for hot water
9. Unit dimension & weight（mm） 310*340*1035

PT-1400

1. Hot & room temperature& cold water
2. Stainless steel water tank (SUS304)
3. High efficiency compressor cooling
4. With Storage cabinet or refrigerator
5. Hot water capacity: heating L/h (≥90℃) 500W 5L
6. Cold water capacity: cooling L/h (≤10℃) 85W 2L
7. Paper cup storage column
8. Safety lock for hot water
9. Unit dimension & weight（mm） 310*340*1035

PT-1400	1. Hot & room temperature& cold water 2. Stainless steel water tank (SUS304) 3. High efficiency compressor cooling 4. With Storage cabinet or refrigerator 5. Hot water capacity: heating L/h (≥90℃) 500W 5L 6. Cold water capacity: cooling L/h (≤10℃) 85W 2L 7. Paper cup storage column 8. Safety lock for hot water 9. Unit dimension & weight（mm） 310*340*1035

PT-1405

1. Hot & room temperature& cold water
2. Stainless steel water tank (SUS304)
3. High efficiency compressor cooling
4. With Storage cabinet or refrigerator
5. Hot water capacity: heating L/h (≥90℃) 500W 5L
6. Cold water capacity: cooling L/h (≤10℃) 85W 2L
7. Paper cup storage column
8. Safety lock for hot water
9. Unit dimension & weight （mm） 310*340*1035

PT-1403

1. Hot & room temperature& cold water
2. Stainless steel water tank (SUS304)
3. High efficiency compressor cooling
4. With Storage cabinet or refrigerator
5. Hot water capacity: heating L/h (≥90℃) 500W 5L
6. Cold water capacity: cooling L/h (≤10℃) 85W 2L
7. Paper cup storage column
8. Safety lock for hot water
9. Unit dimension & weight (mm) 310*340*1035

PT-1407

1. Hot & room temperature& cold water
2. Stainless steel water tank (SUS304)
3. High efficiency compressor cooling
4. With Storage cabinet or refrigerator
5. Hot water capacity: heating L/h (≥90℃) 500W 5L
6. Cold water capacity: cooling L/h (≤10℃) 85W 2L
7. Paper cup storage column
8. Safety lock for hot water
9. Unit dimension & weight （mm） 34.5*395*111mm

PT-1404

1. Hot & room temperature& cold water
2. Stainless steel water tank (SUS304)
3. High efficiency compressor cooling
4. With Storage cabinet or refrigerator
5. Hot water capacity: heating L/h

(≥90℃) 500W 5L

6. Cold water capacity: cooling L/h

(≤10℃) 85W 2L

7. Paper cup storage column
8. Safety lock for hot water
9. Unit dimension & weight （mm）

310*340*1035

PT-1406

1. Hot & room temperature& cold water
2. Stainless steel water tank (SUS304)
3. High efficiency compressor cooling
4. With Storage cabinet or refrigerator
5. Hot water capacity: heating L/h (≥90℃) 500W 5L
6. Cold water capacity: cooling L/h (≤10℃) 85W 2L
7. Paper cup storage column
8. Safety lock for hot water
9. Unit dimension & weight （mm）310*340*1035

PT-1398

1. Hot & room temperature& cold water
2. Stainless steel water tank (SUS304)
3. High efficiency compressor cooling
4. With Storage cabinet or refrigerator
5. Hot water capacity: heating L/h (≥90℃) 500W 5L
6. Cold water capacity: cooling L/h (≤10℃) 85W 2L
7. Paper cup storage column
8. Safety lock for hot water
9. Unit dimension & weight （mm）310*340*1035

PT-1411L

Hot& cold & Normal

Cooling: Compressor

Type: PP+CTO+RO/UF+POST

Cooling Capacity:5-10"C 2L/H 90W 3L

Heating Capacity:85-95C 5L/H 430W 1.5L

Normal: 1.5L

PT-1414L

Hot& cold & Normal

Cooling:Compressor

Type:PP+CTO+UF+POST

Cooling Capacity:5-10"C 2L/H 90W 3L

Heating Capacity:85-95C 5L/H 430W 1.5L

Normal:1.5L

NO RO OPTION

PT-1415L

Hot& cold & Normal

Cooling:Compressor

Type:PP+CTO+RO/UF+POST

Cooling Capacity:5-10"C 2L/H 90W 3L

Heating Capacity:85-95C 5L/H 430W 1.5L

Normal:1.5L

PT-1416L

Hot& cold & Normal

Cooling:Compressor

Type:PP+CTO+RO/UF+POST

Cooling Capacity:5-10"C 2L/H 90W 3L

Heating Capacity:85-95C 5L/H 430W 1.5L

Normal:1.5L

Desktop Water Dispensers

IP-89T
36*33*52cm³

IP-1292T
36*33*52cm³

IP-178T
36*33*52cm³

IP-71T
34*33*55cm³

IP-8201C
29*52*54.5cm³

IP-290-3C
48*33*56cm³

Type	Bottle uploading	
Heating capacity	500W/85-95℃	
Cooling capacity	75W/10-15 ℃	90W/6-10℃
	Eletronic	Compressor
Tank volume	1/1.4 Litre	1/3 Litre
Material	ABS plastic and 0.5mm side plate	
20ft/40HQ	448/1155PCS	
OEM	LOGO/COLOR/CARTON BOX/USER MANUAL	

General Configuration

*Hot and cold
*Asbeila brand
*Compressor cooling syste
*Welding SS304 tank

IP-08T
34*33*55cm³

IP-1135T
36*33*52cm³

IP-1136T
36*33*52cm³

IP-22T
36*33*52cm³

IP-95T
36*33*52cm³

IP-63T
36*33*52cm³

Type	Bottle uploading	
Heating capacity	500W/85-95℃	
Cooling capacity	75W/10-15 ℃	90W/6-10℃
	Eletronic	Compressor
Tank volume	1/1.4 Litre	1/3 Litre
Material	ABS plastic and 0.5mm side plate	
20ft/40HQ	448/1155PCS	
OEM	LOGO/COLOR/CARTON BOX/USER MANUAL	

General Configuration

*Hot and cold
*Asbeila brand
*Compressor cooling syste
*Welding SS304 tank

IP-29T
36*33*52cm³

IP-96T
36*33*52cm³

IP-03T
36*33*52cm³

IP-1291T
36*33*52cm³

PP plastic no hot no cold

IP-01T
25*25*27cm³

IP-02T
25*25*27cm³

IP-03T
32.3*32.5*31.3cm³

Type	Bottle uploading	
Heating capacity	500W/85-95℃	
Cooling capacity	75W/10-15 ℃	90W/6-10℃
	Eletronic	Compressor
Tank volume	1/1.4 Litre	1/3 Litre
Material	ABS plastic and 0.5mm side plate	
20ft/40HQ	448/1155PCS	
OEM	LOGO/COLOR/CARTON BOX/USER MANUAL	

General Configuration

*Hot and cold
*Asbeila brand
*Compressor cooling syste
*Welding SS304 tank

MOQ: 1*20ft container

IP-68T

32*32*43cm³

IP-36T

32*32*43cm³

IP-88T

32*32*43cm³

IP-QD

28*28*36cm³

Type	Bottle uploading
Heating capacity	500W/85-95℃
Cooling capacity	75W/10-15℃
	Eletronic
Tank volume	1/1.4 Litre
Material	ABS plastic and 0.5mm side plate
20ft/40HQ	630/1550PCS
OEM	LOGO/COLOR/CARTON BOX/USER MANUAL

General Configuration

*Hot and cold *Electronic cooling syste
*Welding Ss304 hot tank

MOQ: 1*20ft container

Certification: CE,RoHS

Voltage(V):220V

Power (W): 55

Type: Table top

Filter: PP+GAC+RO

Work pressure:: 0.15-0.4MPa

Size:430*185*400 mm

Water_supply:4~45(℃)/3.6~58(Psi)

Temperature: 6 grade of hot water adjustable

Water supply: Removable tank or pipeline

Certification: CE,RoHS

Voltage(V):220V

Power (W): 55

Type: Table top

Filter: Complex+RO

Work pressure:: 0.15-0.4MPa

Size:430*185*400 mm

Source_water:4~45(℃)/3.6~58(Psi)

Temperature: 6 grade of hot water adjustable

Water supply: Removable tank or pipeline

Certification: CE,RoHS

Voltage(V):220V

Power (W): 55

Type: Table top

Filter: Complex+RO

Work pressure:: 0.15-0.4MPa

Size:430*185*400 mm

Source_water:4~45(℃)/3.6~58(Psi)

Temperature: 6 grade of hot water adjustable

Water supply: Removable tank or pipeline

RO•UF SYSTEM WATER DISPENSER
HEALTHY DRINKING WATER

107T-A

107T-B

BH-YLR-UF-107T(A\B)

- Ultra hygienic safe & durable water
- Stylish & attractive plastic front design
- Using plastic with bacterium-resistance function
- Stainless steel for cold and hot tank
- Adjustable temp. control throuth thermostat
- High efficiency compressor cooling
- Double safty protection against low water lever
- Large storage cabinet/refrigerator

Model NO.	BH-YLR-UF-107T
Filter(RO system)	PP+UF+T33
Description	Hot & cold Compressor cooling with storage cabinet
Rated voltage/frequenc	220-240V/110-127V 50/60Hz
Heating power	550W
Cooling power	90W
Heating capacity	5L/h,85-95℃
Cooling capacity	2L/h,5-10℃
Packing dimension	32.5x40x52cm
Loading Qty.	1015PCS/40' HC

TABLE TYPE WATER DISPENSER
HEALTHY DRINKING WATER

107T-A

107T-B

BH-YLR-TB-107T(A\B/C)

- Ultra hygienic safe & durable water
- Stylish & attractive plastic front design
- Using plastic with bacterium-resistance function
- Stainless steel for cold and hot tank
- Adjustable temp. control throuth thermostat
- High efficiency compressor cooling
- Double safty protection against low water lever
- Large storage cabinet/refrigerator

Model NO.	BH-YLR-TB-107T
Filter(RO system)	PP+UF+T33
Description	Hot & cold Compressor cooling with storage cabinet
Rated voltage/frequenc	220-240V/110-127V 50/60Hz
Heating power	550W
Cooling power	90W
Heating capacity	5L/h,85-95℃
Cooling capacity	2L/h,5-10℃
Packing dimension	32.5x40x52cm
Loading Qty.	1015PCS/40' HC

107T-C

TABLE TYPE WATER DISPENSER
HEALTHY DRINKING WATER

106T-A

106T-B

BH-YLR-TB-106T(A\B)

- Ultra hygienic safe & durable water
- Stylish & attractive plastic front design
- Using plastic with bacterium-resistance function
- Stainless steel for cold and hot tank
- Adjustable temp. control throuth thermostat
- High efficiency compressor cooling
- Double safty protection against low water lever
- Large storage cabinet/refrigerator

Model NO.	BH-YLR-TB-106T
Filter(RO system)	PP+UF+T33
Description	Hot & cold Compressor cooling with storage cabinet
Rated voltage/frequenc	220-240V/110-127V 50/60Hz
Heating power	550W
Cooling power	90W
Heating capacity	5L/h,85-95℃
Cooling capacity	2L/h,5-10℃
Packing dimension	32.5x40x52cm
Loading Qty.	1015PCS/40' HC

TABLE TYPE WATER DISPENSER
HEALTHY DRINKING WATER

BH-YLR-TB-91T

- Ultra hygienic safe & durable water
- Stylish & attractive plastic front design
- Using plastic with bacterium-resistance function
- Stainless steel for cold and hot tank
- Adjustable temp. control throuth thermostat
- High efficiency compressor cooling
- Double safty protection against low water lever
- Large storage cabinet/refrigerator

Model NO.	BH-YLR-TB-91T
Filter(RO system)	PP+UF+T33
Description	Hot & cold Compressor cooling with storage cabinet
Rated voltage/frequenc	220-240V/110-127V 50/60Hz
Heating power	550W
Cooling power	90W
Heating capacity	5L/h,85-95℃
Cooling capacity	2L/h,5-10℃
Packing dimension	32.5x34x52cm
Loading Qty.	1200PCS/40' HC

BH-YLR-02C

TABLE TYPE WATER DISPENSER

HEALTHY DRINKING WATER

BH-YLR-TB-16T/HL

BH-YLR-TB-89T

BH-YLR-TB-95

- Ultra hygienic safe & durable water
- Stylish & attractive plastic front design
- Using plastic with bacterium-resistance function
- Stainless steel for cold and hot tank
- Adjustable temp. control throuth thermostat
- High efficiency compressor cooling
- Double safty protection against low water lever

Description	Hot & cold Compressor cooling
Rated voltage/frequenc	220-240V/110-127V 50/60Hz
Heating power	550W
Cooling power	90W
Heating capacity	5L/h,85-95℃
Cooling capacity	2L/h,5-10℃
Packing dimension	36x33x52cm
Loading Qty.	448PCS/20′ GP 1120PCS/40′ HQ

BH-YLR-TB-16T/E

BH-YLR-TB-08T

BH-YLR-TB-03

- Ultra hygienic safe & durable water
- Stylish & attractive plastic front design
- Using plastic with bacterium-resistance function
- Stainless steel for cold and hot tank
- Adjustable temp. control throuth thermostat
- High efficiency compressor cooling
- Double safty protection against low water lever

Description	Hot & cold Compressor cooling
Rated voltage/frequenc	220-240V/110-127V 50/60Hz
Heating power	550W
Cooling power	90W
Heating capacity	5L/h,85-95℃
Cooling capacity	2L/h,5-10℃
Packing dimension	36x33x52cm
Loading Qty.	448PCS/20′ GP 1120PCS/40′ HQ

BH-YLR-TB-178

Desktop water Dispenser

YT-60A

Cooling Method	Electric Cooling
Water temperature	Hot:88℃-95℃ , Cold:12℃-15℃
Heating Power	500W
Cooling Power	75W
Cooling Capacity	0.75L/H

G.W./N.W.	2.0KG/1.7KG
Product size	190*200*280mm
Package size	220*200*310mm
Loading Qty	2200PCS/20'P

YT-61mini

Cooling Method	Electric Cooling
Water temperature	Hot:88℃-95℃ , Cold:12℃-15℃
Heating Power	500W
Cooling Power	75W
Cooling Capacity	0.75L/H

G.W./N.W.	2.0KG/1.7KG
Product size	190*200*280mm
Package size	220*200*310mm
Loading Qty	2200PCS/20'P

YT-71A

Cooling Method	Electric Cooling
Water temperature	Hot:88℃-95℃ , Cold:12℃-15℃
Heating Power	500W
Cooling Power	70W
Heating Capacity	5L/H
Cooling Capacity	0.8L/H

G.W./N.W.	2.5KG/2.0KG
Product size	275*290*388mm
Package size	290*295*420mm
Loading Qty	832pcs/20'P 1980/40HQ

YT-72A

Cooling Method	Electric Cooling
Water temperature	Hot:88℃-95℃ , Cold:12℃-15℃
Heating Power	500W
Cooling Power	70W
Heating Capacity	5L/H
Cooling Capacity	0.8L/H

G.W./N.W.	2.5KG/2.0KG
Product size	275*290*388mm
Package size	290*295*420mm
Loading Qty	832pcs/20'P 1980/40HQ

JRT-112

Cooling Method	Instant heating
Water temperature	Hot:≥93℃
Heating Power	2200W
Cooling Power	
Heating Capacity	20L/H
Cooling Capacity	

G.W./N.W.	2.5KG/2.0KG
Product size	280*180*280mm
Package size	300*219*318mm
Loading Qty	1428pcs/20'P 3328/40HQ

Desktop water Dispenser

YT-62A

Cooling Method	Electric Cooling
Water temperature	Hot:88℃-95℃ , Cold:12℃-15℃
Heating Power	500W
Cooling Power	75W
Heating Capacity	5L/H
Cooling Capacity	0.8L/H

G.W./N.W.	3.8KG/3.2KG
Product size	275*270*370mm
Package size	315*325*420mm
Loading Qty	1554PCS/40'HQ 1295PCS/40'P 630PCS/20'P

YT-102A

Cooling Method	Electric Cooling
Water temperature	Hot:88℃-95℃ Cold:12℃-15℃
Heating Power	500W
Cooling Power	75W
Heating Capacity	5L/H
Cooling Capacity	0.8L/H

G.W./N.W.	3.8kg/3.2kg
Product size	27.5x27x37cm
Package size	31.5x32.5x42cm
Loading Qty	1554PCS/40'HQ 1295PCS/40'P 630PCS/20'P

YT-1831A

Cooling Method	Electric Cooling
Water temperature	Hot:88℃-95℃ Cold:12℃-15℃
Heating Power	500W
Cooling Power	75W
Heating Capacity	5L/H
Cooling Capacity	0.8L/H

G.W./N.W.	5kg/4.2kg
Product size	33.2x35.5x43.5cm
Package size	1330PCS/40'HQ 1200PCS/40'P
Loading Qty	600PCS/20'P

YT-183A

Cooling Method	Electric Cooling
Water temperature	Hot:88℃-95℃ Cold:12℃-15℃
Heating Power	500W
Cooling Power	75W
Heating Capacity	5L/H
Cooling Capacity	0.8L/H

G.W./N.W.	5kg/4.2kg
Product size	33.2x35.5x43.5cm
Package size	1330PCS/40'HQ 1200PCS/40'P
Loading Qty	600PCS/20'P

JRT-H8

Cooling Method	Instant heating
Water temperature	Hot:≥93℃
Heating Power	2200W
Cooling Power	
Heating Capacity	20L/H
Cooling Capacity	

G.W./N.W.	4.3KG/3.4KG
Product size	383*198*353mm
Package size	450*270*430mm
Loading Qty	575pcs/20'P 1340/40HQ

Model:YLR-V-T

Water Faucets Qty: 2
Can be with POU function? NO.
Packing Dimension(cm)L*W*H:32*32*45cm

Model:YLR-G-T

Water Faucets Qty: 2
Can be with POU function? NO.
Packing Dimension(cm)L*W*H:33*33*52cm

Model:YLR-T25

Water Faucets Qty: 2
Can be with POU function? NO.
Packing Dimension(cm)L*W*H:33*37*47cm

Model:YLR-T26

Water Faucets Qty: 3
Can be with POU function? NO.
Packing Dimension(cm)L*W*H:33*37*47cm

Model:YLR-T63

Water Faucets Qty: 2

Can be with POU function? NO.

Packing Dimension(cm)L*W*H:29*31*41cm

Model:YLR-T5

Water Faucets Qty: 2

Can be with POU function? NO.

Packing Dimension(cm)L*W*H:27*28*38cm

Model:YLR-A3-T

Water Faucets Qty: 2
Can be with POU function? YES.
Packing Dimension(cm)L*W*H:36.5*37*60cm

Model:YLR-B-T

Water Faucets Qty: 2
Can be with POU function? YES.
Packing Dimension(cm)L*W*H:33*37*56cm

Model:YLR-C-T

Water Faucets Qty: 2
Can be with POU function? YES.
Packing Dimension(cm)L*W*H:33*37*56cm

Model:YLR-D-T

Water Faucets Qty:2 or 3
Can be with POU function? YES.
Packing Dimension(cm)L*W*H:33*37*56cm

HOT AND COLD

- Strong ABS body
- High quality Compressor cooling
- Stainless steel water tank
- Food grade material

Description	Hot and cold
Heating power :	450W
Cooling power :	100W
Product size :	310x310x500mm
Carton size :	330x340x540mm
G.W/N.W :	13kg/11kg
Loading quantity :	1120pcs/40HQ

T801 White

T802 White

T803 Silver

T804 White

T805 Silver

PS-STR-96W

Model No.	PS-STR-98W / 98G / 98P/ 98R
Rated Voltage	220V~/110V~/127V~
Rated Frequency	50/60Hz
Cooling Method	Compressor Cooling
Function	Hot & Cold
Heating Power	550W
Cooling Power	90W
Heating Capacity	≥90℃ 5.0L/h
Cooling Capacity	≤10℃ 2.0L/h
N.W./G.W.	10.0/11.0 Kgs
Packing Size	350x320x550 mm
Loading Qty:	924Pcs/40HQ
	448Pcs/20GP

Product advantage

- Clean & healthy water pouring
- Hygiene and food grade water tank
- Anti-leakage water system
- Fast heating & cooling water
- Easy maintenance

PS-STR-96P

PS-STR-96R

PS-STR-96B

Product advantage

- Clean & healthy water pouring
- Hygiene and food grade water tank
- Anti-leakage water system
- Fast heating & cooling water
- Easy maintenance

PS-STR-102

PS-STR-39

PS-STR-98

- ► Hot Water
- ► Normal Water
- ► Cold Water
- ► 16 Years Leading Brand Of Drinking Water
- ► Child Safety Lock
- ► Food Grade Material

Model No.	PS-STR- 39 / 98 / 102
Rated Voltage	220V~/110V~/127V~
Rated Frequency	50/60Hz
Cooling Method	Compressor Cooling
Function	Hot & Cold
Heating Power	550W
Cooling Power	90W
Heating Capacity	≥90℃ 5.0L/h
Cooling Capacity	≤10℃ 2.0L/h
N.W./G.W.	10.0/11.0 Kgs
Packing Size	350x320x550 mm
Loading Qty:	924Pcs/40HQ
	448Pcs/20GP

Product advantage

- Clean & healthy water pouring
- Hygiene and food grade water tank
- Anti-leakage water system
- Fast heating & cooling water
- Easy maintenance

PS-STR-89

PS-STR-103

▶ **Hot Water**

▶ **Normal Water**

▶ **Cold Water**

▶ **16 Years Leading Brand Of Drinking Water**

▶ **Child Safety Lock**

▶ **Food Grade Material**

Model No.	PS-STR- 89 /103
Rated Voltage	220V~/110V~/127V~
Rated Frequency	50/60Hz
Cooling Method	Compressor Cooling
Function	Hot & Normal & Cold
Heating Power	550W
Cooling Power	90W
Heating Capacity	≥90℃ 5.0L/h
Cooling Capacity	≤10℃ 2.0L/h
N.W./G.W.	10.0/11.0 Kgs
Packing Size	360x320x550 mm
Loading Qty:	924Pcs/40HQ
	448Pcs/20GP

Tabletop Water Dispenser

Product advantage

- Clean & healthy water pouring
- Hygiene and food grade water tank
- Anti-leakage water system
- Fast heating & cooling water
- Easy maintenance

▶ Hot water

▶ Normal Water

▶ Cold Water

16 years

▶ 16 Years Leading Brand Of Drinking Water

▶ Food Grade Material

Product advantage

- Clean & healthy water pouring
- Hygiene and food grade water tank
- Anti-leakage water system
- Fast heating & cooling water
- Easy maintenance

PS-STR-02

PS-STR-02B

PS-STR-02S

▶ Hot Water

▶ Cold Water

▶ 16 Years Leading Brand Of Drinking Water

▶ Food Grade Material

Model No.	PS-STR-02W / 02S / 02B	
Rated Voltage	220V~/110V~/127V~	220V~/110V~/127V~
Rated Frequency	50/60Hz	50/60Hz
Cooling Method	Electric Cooling	---
Function	Hot & Cold	Hot & Normal
Heating Power	550W	550W
Cooling Power	70W	---
Heating Capacity	≥90℃ 5.0L/h	≥90℃ 5.0L/h
Cooling Capacity	10℃ -15℃ 0.8L/h	---
N.W./G.W.	3.0/2.5Kgs	2.5/2.0Kgs
Packing Size	280X280X380mm	280X280X380mm
Loading Qty:	2232Pcs/40HQ	2232Pcs/40HQ
	960Pcs/20GP	960Pcs/20GP

Product advantage

- Clean & healthy water pouring
- Hygiene and food grade water tank
- Anti-leakage water system
- Fast heating & cooling water
- Easy maintenance

PS-STR-02W

PS-STR-10

PS-STR-12

▶ Hot Water

▶ Cold Water

▶ 16 Years Leading Brand Of Drinking Water

▶ Food Grade Material

Model No.	PS-STR- 02W / 02S / 02B	
Rated Voltage	220V~/110V~/127V~	220V~/110V~/127V~
Rated Frequency	50/60Hz	50/60Hz
Cooling Method	Electric Cooling	---
Function	Hot & Cold	Hot & Normal
Heating Power	550W	550W
Cooling Power	70W	---
Heating Capacity	≥90℃ 5.0L/h	≥90℃ 5.0L/h
Cooling Capacity	10℃ -15℃ 0.8L/h	---
N.W./G.W.	3.5/3.0 Kgs	3.0/2.5 Kgs
Packing Size	315x300x420 mm	315x300x420 mm
Loading Qty:	1640Pcs/40HQ	1640Pcs/40HQ
	665Pcs/20GP	665Pcs/20GP

Hanging Wall
Water Dispenser

- Hot Water
- Cold Water
- Food Grade Material
- 12 Years Leading Brand Of Drinking Water

GX-1

GX-2

GX-4

Model No.	GX-1	GX-2	GX-3
Rated Voltage	220V~/110V~/127V~	220V~/110V~/127V~	220V~/110V~/127V~
Rated Frequency	50/60Hz	50/60Hz	50/60Hz
Cooling Melthod	Electric Cooling	Electric Cooling	Electric Cooling
Function	Hot & Cold	Hot & Cold	Hot & Cold
Heating Power	550W	550W	550W
Cooling Power	60W	60W	60W
Heating Capacity	≥5.0L/h(≥ 90℃)	≥5.0L/h(≥ 90℃)	≥5.0L/h(≥ 90℃)
Cooling Capacity	≥0.5L/h(≤ 15℃)	≥0.5L/h(≤ 15℃)	≥0.5L/h(≤ 15℃)
Packing Size	350x210x480mm	350x210x480mm	350x210x480mm

Model:	AFK-15	
Function:	Cold and Hot Desktop water dispenser	
Cooling Method	Electric Cooling	
Heating Power	550W	
Heating Capacity	5.0L/H ,85-90℃	
Cooling Capacity:	0.8L/h,10-15℃	
Rated voltage/frequency:	110-127V~/220-240V~ 50/60Hz	
Packing size:	310*310*420mm	
N.W/G.W:	5.5/6.5kgs	
Loading Quantity:	20'GP	460pcS
	40'HQ	1050pcs

- Ultra hygienic safe & durable material
- Stylish & attractive appearance design
- Using plastic with bacterium-resistance function
- Stainless steel for cold and hot tank
- Adjustable temperature control through thermostat
- High efficiency Electric cooling
- Double safety protection against low water lever

Model:	AFK-16	
Function:	Cold and Hot Desktop water dispenser	
Cooling Method	Electric Cooling	
Heating Power	550W	
Heating Capacity	5.0L/H ,85-90℃	
Cooling Capacity:	0.8L/h,10-15℃	
Rated voltage/frequency:	110-127V~/220-240V~ 50/60Hz	
Packing size:	310*310*420mm	
N.W/G.W:	5.5/6.5kgs	
Loading Quantity:	20'GP	460pcS
	40'HQ	1050pcs

- Ultra hygienic safe & durable material
- Stylish & attractive appearance design
- Using plastic with bacterium-resistance function
- Stainless steel for cold and hot tank
- Adjustable temperature control through thermostat
- High efficiency Electric cooling
- Double safety protection against low water lever

Model:	AFK-106	
Function:	Cold & Hot Desktop water dispenser	
Heating Power	550W	
Heating Capacity	5.0L/H ,85-90℃	
Rated voltage/frequency:	110-127V~/220-240V~ 50/60Hz	
Packing size:	360*330*520mm	
Cooling Method	Electric Cooling	Compressor Cooling
Cooling Capacity	0.8L/h,10-15℃	1.5L/h,5-10℃
Cooling Power	75W	85W
N.W/G.W	5.5/6.5kgs	11/12kgs
Loading Quantity	20'GP	430pcS
	40'HQ	1020pcs

- Ultra hygienic safe & durable material
- Stylish & attractive appearance design
- Using plastic with bacterium-resistance function
- Stainless steel for cold and hot tank
- Adjustable temperature control through thermostat
- High efficiency Electric cooling
- Double safety protection against low water lever

Model:	AFK-108	
Function:	Cold & Hot Desktop water dispenser	
Heating Power	550W	
Heating Capacity	5.0L/H ,85-90℃	
Rated voltage/frequency:	110-127V~/220-240V~ 50/60Hz	
Packing size:	360*330*520mm	
Cooling Method	Electric Cooling	Compressor Cooling
Cooling Capacity	0.8L/h,10-15℃	1.5L/h,5-10℃
Cooling Power	75W	85W
N.W/G.W	5.5/6.5kgs	11/12kgs
Loading Quantity	20'GP	430pcS
	40'HQ	1020pcs

Model:	AFK-21	
Function:	Cold and Hot Desktop water dispenser	
Cooling Method	Electric Cooling	
Heating Power	550W	
Heating Capacity	5.0L/H ,85-90℃	
Cooling Capacity:	0.8L/h,10-15℃	
Rated voltage/frequency:	110-127V~/220-240V~ 50/60Hz	
Packing size:	360*330*520mm	
N.W/G.W:	5.5/6.5kgs	
Loading Quantity:	20'GP	430pcS
	40'HQ	1020pcs

- Ultra hygienic safe & durable material
- Stylish & attractive appearance design
- Using plastic with bacterium-resistance function
- Stainless steel for cold and hot tank
- Adjustable temperature control through thermostat
- High efficiency Electric cooling
- Double safety protection against low water lever

Model:	AFK-22	
Function:	Cold and Hot Desktop water dispenser	
Cooling Method	Electric Cooling	
Heating Power	550W	
Heating Capacity	5.0L/H ,85-90℃	
Cooling Capacity:	0.8L/h,10-15℃	
Rated voltage/frequency:	110-127V~/220-240V~ 50/60Hz	
Packing size:	360*330*520mm	
N.W/G.W:	5.5/6.5kgs	
Loading Quantity:	20'GP	430pcS
	40'HQ	1020pcs

Model:	AFK-25	
Function:	Cold and Hot Desktop water dispenser	
Cooling Method	Electric Cooling	
Heating Power	550W	
Heating Capacity	5.0L/H ,85-90℃	
Cooling Capacity:	0.8L/h, 10-15℃	
Rated voltage/frequency:	110-127V~/220-240V~ 50/60Hz	
Packing size:	310*310*420mm	
N.W/G.W:	5.5/6.5kgs	
Loading Quantity:	20'GP	460pcS
	40'HQ	1050pcs

- Ultra hygienic safe & durable material
- Stylish & attractive appearance design
- Using plastic with bacterium-resistance function
- Stainless steel for cold and hot tank
- Adjustable temperature control through thermostat
- High efficiency Electric cooling
- Double safety protection against low water lever

Model:	AFK-18	
Function:	Cold and Hot Desktop water dispenser	
Cooling Method	Electric Cooling	
Heating Power	550W	
Heating Capacity	5.0L/H ,85-90℃	
Cooling Capacity:	0.8L/h, 10-15℃	
Rated voltage/frequency:	110-127V~/220-240V~ 50/60Hz	
Packing size:	310*310*420mm	
N.W/G.W:	5.5/6.5kgs	
Loading Quantity:	20'GP	460pcS
	40'HQ	1050pcs

- Ultra hygienic safe & durable material
- Stylish & attractive appearance design
- Using plastic with bacterium-resistance function
- Stainless steel for cold and hot tank
- Adjustable temperature control through thermostat
- High efficiency Electric cooling
- Double safety protection against low water lever

Model:	AFK-37	
Function:	Cold & Hot Desktop water dispenser	
Heating Power	550W	
Heating Capacity	5.0L/H ,85-90℃	
Rated voltage/frequency:	110-127V~/220-240V~ 50/60Hz	
Packing size:	360*330*520mm	
Cooling Method	Electric Cooling	Compressor Cooling
Cooling Capacity	0.8L/h,10-15℃	1.5L/h,5-10℃
Cooling Power	75W	85W
N.W/G.W	5.5/6.5kgs	11/12kgs
Loading Quantity	20'GP	430pcS
	40'HQ	1020pcs

- Ultra hygienic safe & durable material
- Stylish & attractive appearance design
- Using plastic with bacterium-resistance function
- Stainless steel for cold and hot tank
- Adjustable temperature control through thermostat
- High efficiency Electric cooling
- Double safety protection against low water lever

Model:	AFK-105	
Function:	Cold & Hot Desktop water dispenser	
Heating Power	550W	
Heating Capacity	5.0L/H ,85-90℃	
Rated voltage/frequency:	110-127V~/220-240V~ 50/60Hz	
Packing size:	360*330*520mm	
Cooling Method	Electric Cooling	Compressor Cooling
Cooling Capacity	0.8L/h,10-15℃	1.5L/h,5-10℃
Cooling Power	75W	85W
N.W/G.W	5.5/6.5kgs	11/12kgs
Loading Quantity	20'GP	430pcS
	40'HQ	1020pcs

- Ultra hygienic safe & durable material
- Stylish & attractive appearance design
- Using plastic with bacterium-resistance function
- Stainless steel for cold and hot tank
- Adjustable temperature control through thermostat
- High efficiency Electric cooling
- Double safety protection against low water lever

Model:	AFK-103	
Function:	Cold & Hot Desktop water dispenser	
Heating Power	550W	
Heating Capacity	5.0L/H ,85-90℃	
Rated voltage/frequency:	110-127V~/220-240V~ 50/60Hz	
Packing size:	360*330*520mm	
Cooling Method	Electric Cooling	Compressor Cooling
Cooling Capacity	0.8L/h,10-15℃	1.5L/h,5-10℃
Cooling Power	75W	85W
N.W/G.W	5.5/6.5kgs	11/12kgs
Loading Quantity	20'GP	430pcS
	40'HQ	1020pcs

- Ultra hygienic safe & durable material
- Stylish & attractive appearance design
- Using plastic with bacterium-resistance function
- Stainless steel for cold and hot tank
- Adjustable temperature control through thermostat
- High efficiency Electric cooling
- Double safety protection against low water lever

Model:	AFK-36	
Function:	Cold & Hot Desktop water dispenser	
Heating Power	550W	
Heating Capacity	5.0L/H ,85-90℃	
Rated voltage/frequency:	110-127V~/220-240V~ 50/60Hz	
Packing size:	360*330*520mm	
Cooling Method	Electric Cooling	Compressor Cooling
Cooling Capacity	0.8L/h,10-15℃	1.5L/h,5-10℃
Cooling Power	75W	85W
N.W/G.W	5.5/6.5kgs	11/12kgs
Loading Quantity	20'GP	430pcS
	40'HQ	1020pcs

- Ultra hygienic safe & durable material
- Stylish & attractive appearance design
- Using plastic with bacterium-resistance function
- Stainless steel for cold and hot tank
- Adjustable temperature control through thermostat
- High efficiency Electric cooling
- Double safety protection against low water lever

Model:	AFK-26	
Function:	Cold & Hot Desktop water dispenser	
Heating Power	550W	
Heating Capacity	5.0L/H ,85-90℃	
Rated voltage/frequency:	110-127V~/220-240V~ 50/60Hz	
Packing size:	360*330*520mm	
Cooling Method	Electric Cooling	Compressor Cooling
Cooling Capacity	0.8L/h,10-15℃	1.5L/h,5-10℃
Cooling Power	75W	85W
N.W/G.W	5.5/6.5kgs	11/12kgs
Loading Quantity	20'GP	430pcS
	40'HQ	1020pcs

MODEL:16T/E

Environmental protection products | child lock | refrigeration | heating | Barreled water (selection) | USB interface | Direct drinking water(selection)

Product parameters

Model:	16T/E
Rated voltage:	220V ~
Rated frequency:	50HZ
Rated total power:	590W
Thermal power:	500W
Refrigeration power:	90W
Power consumption:	1.5KW.h/24h
Anti electric protection type:	I class
Use of ambient temperature:	10 ~ 32℃
Water heating capacity:	⩾90℃ 5L/h
Water cooling capacity:	⩽10℃ 2L/hg
Shape size:	310X320X460mm

MODEL:16T/D

Environmental protection products | refrigeration | heating | USB interface | Direct drinking water(selection)

Product parameters

Model:	16T/D
Rated voltage:	220V ~
Rated frequency:	50HZ
Rated total power:	590W
Thermal power:	500W
Refrigeration power:	90W
Power consumption:	1.5KW.h/24h
Anti electric protection type:	I class
Use of ambient temperature:	10 ~ 32℃
Water heating capacity:	⩾90℃ 5L/h
Water cooling capacity:	⩽10℃ 2L/hg
Shape size:	310X320X460mm

MODEL:37T

Product parameters

Model:	37T
Rated voltage:	220V ~
Rated frequency:	50HZ
Rated total power:	590W
Thermal power:	500W
Refrigeration power:	90W
Power consumption:	1.5KW.h/24h
Anti electric protection type:	I class
Use of ambient temperature:	10 ~ 32℃
Water heating capacity:	≥90℃ 5L/h
Water cooling capacity:	≤10℃ 2L/h
Shape size:	310X320X460mm

MODEL:68TD

Product parameters

Model:	68TD
Rated voltage:	220V ~
Rated frequency:	50HZ
Rated total power:	590W
Thermal power:	500W
Refrigeration power:	90W
Power consumption:	1.5KW.h/24h
Anti electric protection type:	I class
Use of ambient temperature:	10 ~ 32℃
Water heating capacity:	≥90℃ 5L/h
Water cooling capacity:	≤15℃ 0.7L/h
Shape size:	300X310X400mm

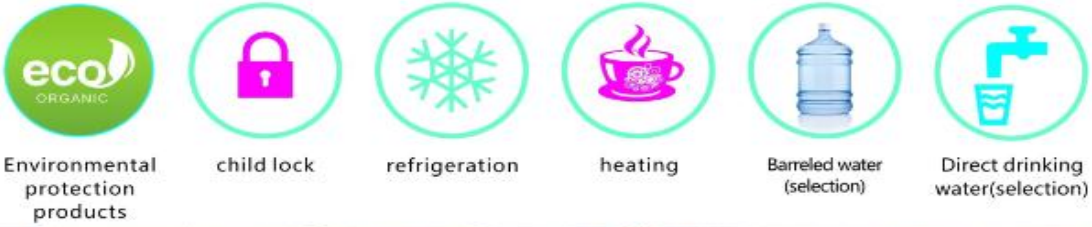

Environmental protection products | child lock | refrigeration | heating | Barreled water (selection) | Direct drinking water(selection)

Product parameters

Model:	105T
Rated voltage:	220V ~
Rated frequency:	50HZ
Rated total power:	590W
Thermal power:	500W
Refrigeration power:	90W
Power consumption:	1.5KW.h/24h
Anti electric protection type:	I class
Use of ambient temperature:	10 ~ 32℃
Water heating capacity:	≥90℃ 5L/h
Water cooling capacity:	≤10℃ 2L/h
Shape size:	310X340X480mm

Product parameters

Model:	103T
Rated voltage:	220V ~
Rated frequency:	50HZ
Rated total power:	590W
Thermal power:	500W
Refrigeration power:	90W
Power consumption:	1.5KW.h/24h
Anti electric protection type:	I class
Use of ambient temperature:	10 ~ 32℃
Water heating capacity:	≥90℃ 5L/h
Water cooling capacity:	≤10℃ 2L/h
Shape size:	380X420X420mm

PT-1411T

- Hot& cold & Normal
- Cooling:Compressor
- Type:PP+CTO+UF+POST
- Cooling Capacity:5-10"C 2L/H 90W 3L
- Heating Capacity:85-95C 5L/H 430W 1.5L
- Normal:1.5L

PT-1413T

- Hot& cold & Normal
- Cooling:Compressor
- Type:PP+CTO+RO/UF+POST
- Cooling Capacity:5-10"C 2L/H 90W 3L
- Heating Capacity:85-95C 5L/H 430W 1.5L
- Normal:1.5L

PT-1415T

- Description:Hot& cold & Normal
- Cooling:Compressor
- Type:PP+CTO+RO/UF+POST
- Cooling Capacity:5-10"C 2L/H 90W 3L
- Heating Capacity:85-95C 5L/H 430W 1.5L
- Normal:1.5L

PT-1416T

- Description:Hot& cold & Normal
- Cooling:Compressor
- Type:PP+UF+POST
- Cooling Capacity:5-10"C 2L/H 90W 3L
- Heating Capacity:85-95C 5L/H 430W 1.5L
- Normal:1.5L

PT-1417T

- Hot& cold & Normal
- Cooling:Compressor
- Type:PP+CTO+RO/UF+POST
- Cooling Capacity:5-10"C 2L/H 90W 3L
- Heating Capacity:85-95C 5L/H 430W 1.5L
- Normal:1.5L

Water Purifier and Others

01. YR100-A

The First Generation:

Water purifier with heating fuction and TDS visible.

02. YR100-AS

The Second Generation:

Water purifier with instant heating and 3 water capacity options.

03. YHR1191-A

The Third Generation:

Upgrated temperature option and UV sterilization.

04. YHR1183-A

The Fourth Generation:

Creative additional drip coffee technology. Purifying, heating, coffee making in one step.

05. YHR1202-A

The Fifth Generation:

Tea /coffee water purifier.

06. YHR1804-A/B

The Sixth Generation:

Most popular hot + cold multifunctional water purifier.

07. YHR1203-A

The Latest Generation:

Creative new designs with easy operation.

DESKTOP RO WATER PURIFIER

Healthier Water for Your Family.

YR100-A

YR100-AS

YHR1191-A

YR100-A Item No.

DESKTOP
WATER PURIFIER

Features

- LED Touch Screen
- TDS Visible
- Smart Power Saving
- Dual Water Resources Option
- Auto Filter Replacement Reminder

Functions

- 6 Stages Filtration System
- 5s Instant Heating
- 4 Temperature Mode
- Child Lock

LED Panel Functions

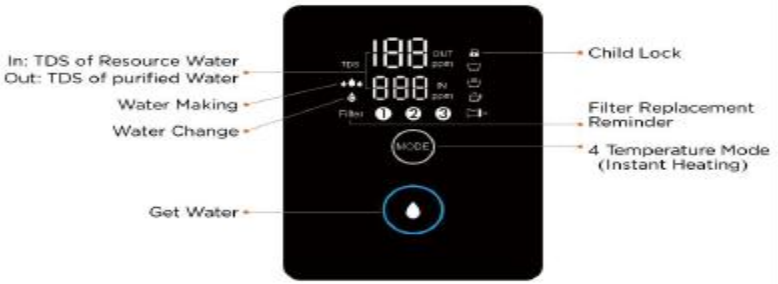

Product Parameter



Voltage	220V / 230V / 240V
N.W / G.W	10.5KG / 13.16KG
Power	2150W
Water flow	1L / min
Water tank	4L
Temperature	Room Temp.- 95 ℃
CBM/Ctn	0.075m³
Product Size	L380 × W244 × H390mm
Carton Size	L450 × W340 × H490mm
Filters	1.PP+Active Carbon / 2.Carbon+PP / 3.RO

YR100-AS Item No.

DESKTOP
WATER PURIFIER

Features

LED Touch Screen
TDS Visible
Smart Power Saving
Dual Water Resources Option
Auto Filter Replacement Reminder

Functions

- 6 Stages Filtration System
- 5s Instant Heating
- 4 Temperature Mode
- 3 Auto Stop Water Volume
- Child Lock

Functions

- 6 Stages Filtration System
- 5s Instant Heating
- UV Sterilization
- Child Lock
- 4 Temperature Mode
- Free Thermal Control
- 3 Auto Stop Water Volume

COFFEE/TEA WATER PURIFIER

Water Purification + Coffee & Tea Extraction

YHR1202-A

YHR1183-A

YHR1203-A(Black)

YHR1804-A/B

YHR1203-A(White)

Item No. YHR1183-A

TABLE TOP

RO UV WATER PURIFIER

Coffee Capsule Maker Function

Features

- TDS Visible
- LED Touch Screen
- Smart Power Saving
- Dual Water Resources Option
- Removable Cup Holder Design
- Auto Stop For Misopen Coffee Flip
- Auto Filter Replacement Reminder

Functions

- 6 Stages Filtration System
- 5s Instant Heating
- UV Sterilization
- Child Lock
- 4 Temperature Mode
- Free Thermal Control
- 3 Auto Stop Water Volume
- Coffee Function
- Tea Function

Three Coffee Flavor Setting

3 Water Nozzles

LED Panel Functions

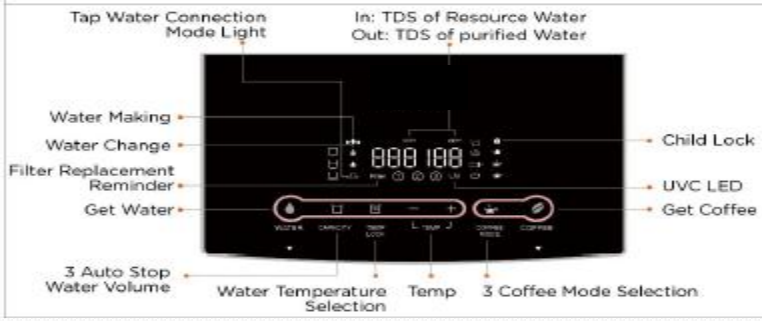

Product Parameter



Voltage	110V / 120V / 220V / 230V / 240V
N.W / G.W	11.5KG / 14.5KG
Power	1900W
Water flow	1L / min
Water tank	4L
Temperature	Room Temp.- 95 ℃
CBM/Ctn	0.091m³
Product Size	L414 × W244.2 × H415mm
Carton Size	L527 x W340 x H510mm
Filters	1.PP+Active Carbon / 2.Carbon+PP / 3.RO

YHR1202-A Item No.

TEA SPECIALIST
WATER MACHINE

All In One Tea & Coffee Capsule Water Purifier

Features

TDS Visible
LED Touch Screen
Smart Power Saving
Dual Water Resources Option
Removable Cup Holder Design
Auto Stop For Misopen Coffee Flip
Auto Filter Replacement Reminder

Functions

- 6 Stages Filtration System
- 5s Instant Heating
- UV Sterilization
- Child Lock
- 4 Temperature Mode
- Free Thermal Control
- 3 Auto Stop Water Volume
- Coffee Function
- Capsule
- Tea Function

LED Panel Functions

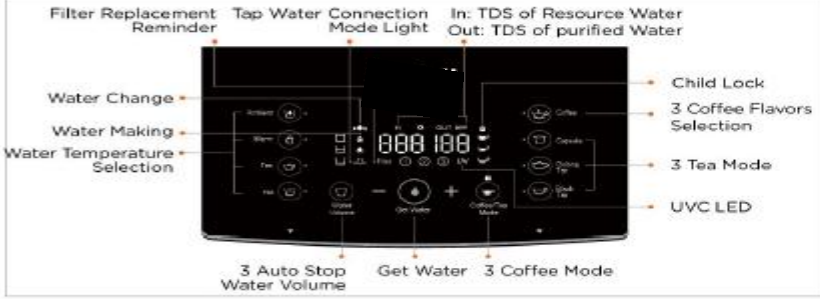

Product Parameter



Voltage	110V / 120V / 220V / 230V / 240V
N.W / G.W	11.5KG / 14.5KG
Power	1900W
Water flow	1L / min
Water tank	4L
Temperature	Room Temp.- 95 ℃
CBM/Ctn	0.091m³
Product Size	L414 × W244.2 × H415mm
Carton Size	L527 x W340 x H510mm
Filters	1.PP+Active Carbon / 2.Carbon+PP / 3.RO

YHR1804-A Item No.

HOT AND COLD

Electronic refrigeration water purifier & Dispenser

Features

- TDS Visible
- LED Touch Screen
- Smart Power Saving
- Dual Water Resources Option
- Removable Cup Holder Design
- Auto Stop For Misopen Coffee Flip
- Auto Filter Replacement Reminder

Functions

- 6 Stages Filtration System
- 5s Instant Heating
- UV Sterilization
- Child Lock
- 4 Temperature Mode
- Cold Water
- 3 Auto Stop Water Volume
- Coffee Function
- Tea Function

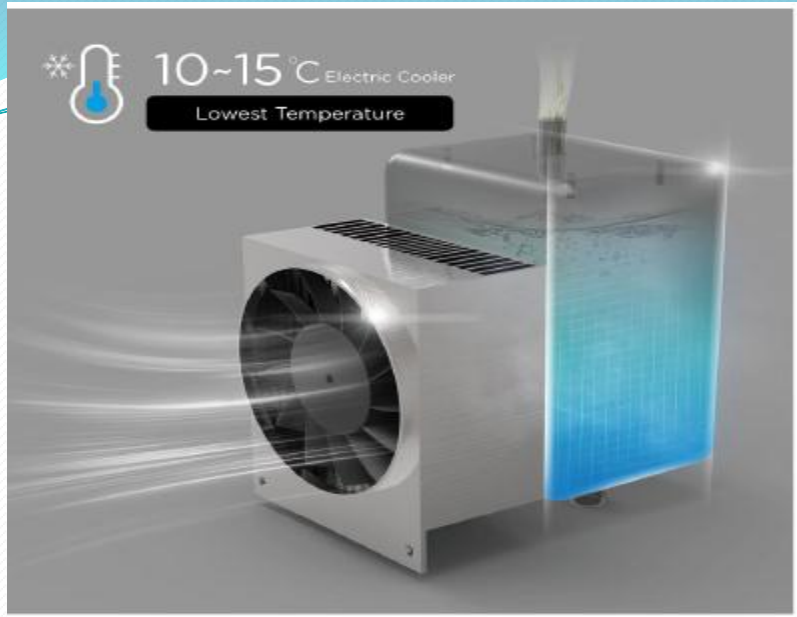

LED Panel Functions

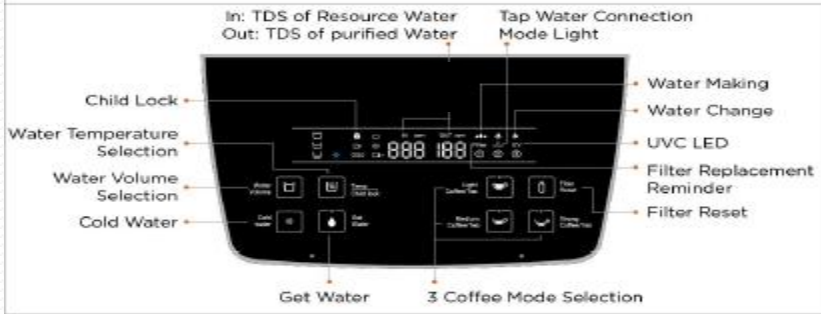

Product Parameter

Voltage	110V / 120V / 220V / 230V / 240V
N.W / G.W	14KG / 16.5KG
Power	2150W
Water flow	1.4L / min
Water tank	5L
Temperature	Cold.- 95 ℃
CBM/Ctn	0.118m³
Product Size	L456 × W300 × H450mm
Carton Size	L541 × W393 × H553mm
Filters	1.PP+Active Carbon / 2.Carbon+PP / 3.RO

YHR1804-B Item No.

HOT AND COLD

Compressor refrigeration water purifier & Dispenser

Features

- TDS Visible
- LED Touch Screen
- Smart Power Saving
- Dual Water Resources Option
- Removable Cup Holder Design
- Auto Stop For Misopen Coffee Flip
- Auto Filter Replacement Reminder

Functions

- 6 Stages Filtration System
- 5s Instant Heating
- UV Sterilization
- 4 Temperature Mode
- Cold Water
- 3 Auto Stop Water Volume
- Coffee Function
- Tea Function
- Child Lock

LED Panel Functions

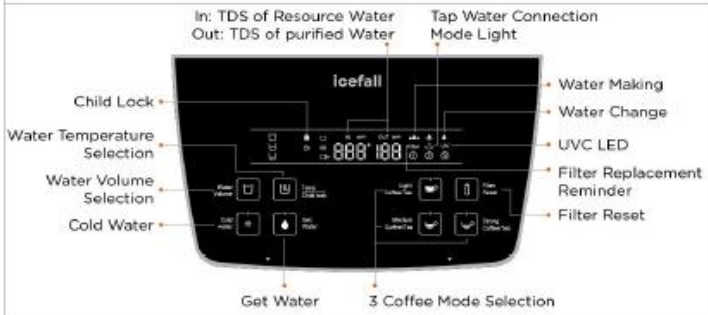

Product Parameter

Voltage	110V / 120V / 220V / 230V / 240V
N.W / G.W	18.5KG / 20.5KG
Power	2150W
Water flow	1.4L / min
Water tank	5L
Temperature	Cold - 95 ℃
CBM/Ctn	0.138m³
Product Size	L557.5 × W300 × H450mm
Carton Size	L634 × W393 × H553mm
Filters	1.PP+Active Carbon / 2.Carbon+PP / 3.RO

DESKTOP RO SYSTEM WATER PURIFIER

Features

- TDS Visible
- LED Touch Screen
- Smart Power Saving
- Dual Water Resources Option
- Removable Cup Holder Design
- Auto Filter Replacement Reminder

Functions

6 Stages Filtration System · 5s Instant Heating · UV Sterilization · Child Lock · 3 Temperature Mode · 2 Auto Stop Water Volume · Free Thermal Control · Coffee Function · Capsule · Tea Function

LED Panel Functions

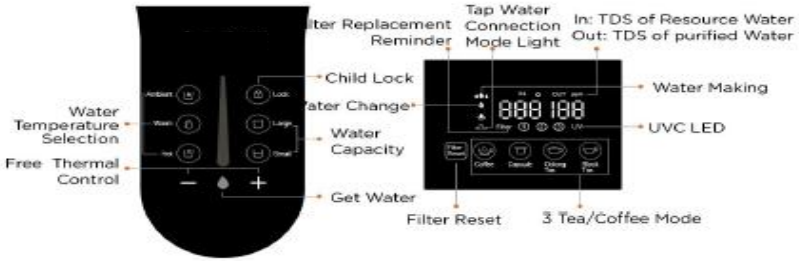

Product Parameter

Voltage	110V / 120V / 220V / 230V / 240V
N.W / G.W	11.5KG / 14.5KG
Power	1900W
Water flow	1L / min
Water tank	4L
Temperature	Room Temp - 95 ℃
CBM/Ctn	0.096m³
Product Size	L445 × W244 × H415mm
Carton Size	L527 × W340 × H510mm
Filters	1.PP+Active Carbon / 2.Carbon+PP / 3.RO

Wall mounted pipeline

GXB-J10

Speed heating technology,Continuous water supply
Fast heating without repeated heating
Double protection against dry,more safe
Big LED display ,touch keys ,smart and convenient
Child Lock Protection,time of water out displayed by LCD
More humanized design

Voltage:220V
Water pressure:0.1-0.3MPa
Water temperature:10℃-38℃
Heating power:2200W
Hot water capacity:20L/H≥93℃
G.W./N.W.:3.6KG/3.1KG

Product size:312*140*420mm
Package size:360*185*470mm
Outer Package Size:780*395*495(4pcs in one carton)

GXB-J6

Speed heating technology,Continuous water supply
Fast heating without repeated heating
Double protection against dry,more safe
Big LED display ,touch keys ,smart and convenient
Child Lock Protection,time of water out displayed by LCD
More humanized design

Voltage:220V
Water pressure:0.1-0.3MPa
Water temperature:10℃-38℃
Heating power:2000W
Hot water capacity:20L/H≥93℃
G.W./N.W.:3.6KG/3.1KG

Product size:312*140*420mm
Package size:360*185*470mm
Outer Package Size:780*395*495(4pcs in one carton)

On Board Computer

Ultra-thin Design

High Recovery Rate

Tankless Design

High Quality NF Membrane

FEATURES:

- Auto Flush
- On Board Computer
- Pure Water Flow: 0.8~1.2L/Min
- Luxury Faucet : GF-02C
- No tankneeded , enjoy fresh pure water at any time
- Machine Dimension: 435x390x105mm
- Packing Dimension: 475x435x210mm



Installation Diagram

PROCESS:

1st Stage: PP Sediment Filter
2nd Stage: Carbon Block Filter
3rd Stage: HIDROTEK RO Membrane

roPad

Compact Tankless RO System

FEATURES:

- On board computer
- Pure water flow: 1.8~2.5L/Min
- Quick fittings
- Luxury Faucet: GF-02C
- No tank needed, enjoy fresh pure water at any time
- Machine Dimension: 435x390x105mm
- Packing Dimension: 475x435x210mm

Installation Diagram

PROCESS:

1st stage: PP sediment filter
2nd stage: Block carbon filter
3rd stage: Iodized resin filter
4th stage: UF membrane
5th stage: Activated carbon

ufPad

Ultrafiltration Water Purifier

RO-75G-T03

FEATURES:

- 3-stage filter: PP&CTO&RO
- Purifier and heater
- No need to install
- 4 temperature options: 100 ℃, 85 ℃, 45 ℃, Ambient
- LED UV
- Machine Dimension: 372x245x410mm
- Packing Dimension: 385x255x430mm

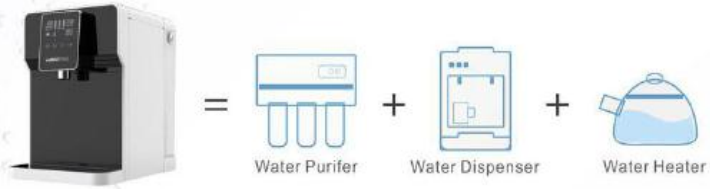

H04

FEATURES:

- Heating power : 500W
- Cooling power : 150W
- Hot water tank : 2L
- Cold water tank : 4L
- Rated Voltage : 220V/110V
- Rated Frequency : 50Hz/60Hz
- Machine Dimension : 470x390x1390mm
- Packing Dimension : 540x470x1510mm

OR

- ☑ Touch Panel
- ☑ LED UV Sterilizer
- ☑ Four-stage Filtration with RO System
- ☑ Filter Replacement Reminder
- ☑ Separate Water Tanks:
  - Ambient(5L)
  - Hot(2L)
  - Cold(4L)

- ■ Simple and elegant.
- ■ Three-temperature water dispenser for demand of hot , cold and ambient water.
- ■ Five-stage filtration(PP+CTO+RO+T33+UV) for direct drinking.
- ■ Bayonet cartridges for convenient replacement, no need to cut off water.
- ■ Ultraviolet water sterilizer in water tank for killing residual bacteria effectively.
- ■ Meet the drinking demand of more than 15 persons.

UF-T02

FEATURES:

- No Need Electricity
- 4-Stage Filtration (PP,GAC,CTO,UF)
- Mini Compact design
- All Bayonet Cartridges
- With two doors at both sides
- Easily replaceable cartridge
- Machine Dimension: 320x205x360mm
- Packing Dimension: 372x245x410mm

Intelligent control
real-time water temperature monitor

Easily replaceable cartridge

HL-3A

Ambient，Hot water
Rated Power：3000W
Heating POWER：3000W
Hot：20L
Rated Voltage：220V
Rated Frequency：50Hz/60Hz
Machine Dimension：40*38*132cm

HL-3B

Ambient，Hot water
Rated Power：3000W
Heating POWER：3000W
Hot：50L
Rated Voltage：220V/380V
Rated Frequency：50Hz/60Hz
Machine Dimension：48*48*167cm

HL-3C

Ambient，Cool water
Rated power：150W
Cooling power：150W
Pure water tank：3L
Cold water tank：6L
Cooling by compressor
Lowest water temperature：3-10℃
Rated Voltage：110V~240V
Rated Frequency：50Hz/60Hz
Machine dimension: 40*38*132cm

H06

Tank size: 20L
Flow rate: hot water 45L/h or ambient water 120L/H (can be customerized)
Filtration: PP sediment, granular carbon filter, ultra filtration membrane (can be customerized)
Product dimension: 600*520*1725mm

Advantages:
- Food grade materials to ensure the safety
- Smart control and water-proof design to ensure the stable operation
- Advanced heat exchange technology to ensure low power consumption
- Can meet the drinking water demands of 50-100 people, suitable for office, school, shopping mall, etc .

H07

Tank size: 30L
Flow rate: hot water 45L/h or ambient water 250L/H (can be customerized)
Filtration: PP sediment, granular carbon filter, ultra filtration membrane (can be customerized)
Product dimension: 1600*520*1725mm

Advantages:
- Food grade materials to ensure the safety
- Smart control and water-proof design to ensure the stable operation
- Advanced heat exchange technology to ensure low power consumption
- Can meet the drinking water demands of 150-200 people, suitable for office, school, shopping mall, etc .

Pipeline Water Filter Dispenser

H01A: Water Dispenser only
H01B: With RO System
H01C: With UF System

- **Water dispenser**
- Large LED display screen
- Separate Holding tanks:
  Ambient(5 L)
  Hot (1.8 L)
  Cold (1.8 L)
- **Cooling by compressor**
- Children lock, it can lock the hot water button
- Nice cabinet
- **Machine Dimension: 36x34x110cm**
- **Packing Dimension: 40x42x116cm**

H02A: Water Dispenser only
H02B: With RO System
H02C: With UF System

- **RO System Inside**
- Large LED display screen
- Separate Holding tanks:
  Ambient(5 L)
  Hot (1.8 L)
  Cold (1.8 L)
- **Cooling by compressor**
- Children lock, it can lock the hot water button
- Nice cabinet
- **Machine Dimension: 36x34x110cm**
- **Packing Dimension: 40x42x116cm**

Pipeline Water Filter Dispenser

H01W-A: Water Dispenser only
H01W-B: With RO System
H01W-C: With UF System

- **Ultrafiltration System Inside**
- Large LED display screen
- Separate Holding tanks:
  Ambient(5 L)
  Hot (1.8 L)
  Cold (1.8 L)
- **Cooling by compressor**
- Children lock, it can lock the hot water button
- Nice cabinet
- **Machine Dimension: 35x36x110cm**
- **Packing Dimension: 40x42x116cm**

H03A: Water Dispenser only
H03B: With RO System
H03C: With UF System

- **Pipeline Water Filter Dispenser**
  (can choose Ro System or Ultrafiltrations System)
- Touch Panel
- Separate Holding tanks:
  Ambient(5L)
  Hot(1.8L)
  Cold(1.8L)
- **Cooling by compressor**
- Children lock, it can lock the hot water button
- Nice cabinet
- **Machine Dimension: 35x36x110cm**
- **Packing Dimension: 40x42x116cm**

Build-in Pipeline Water Dispenser

H10

- Large Screen with temperature display
- Four temperatures and three outlet cup volumes for option
- With UV sterilizer
- Heating water in seconds
- With stainless steel 304 heating tube
- Anti-dry burning system assembled to protect the hot tank
- Flow rate: Hot water ≥ 1.0L/min
  Ambient water≥1.8L/min
- Machine Dimension:450mm*320mm*170mm

H11

- Large Screen display with working status indicator
- Heating water in seconds
- With stainless steel 304 heating tube
- Anti-dry burning system assembled to protect the hot tank
- Flow rate: Hot water ≥ 1.0L/min
  Ambient water≥1.8L/min
- Machine Dimension:450mm*320mm*170mm

Build-in Pipeline Water Dispenser

JW-A8

- Dual water temperature design: ICE &HOT.
- Heat water quickly in 3 seconds.
- Ultra-thin body, wall-hanging design.
- Without inside water tank, drink directly.
- Children lock function prevents from scalding.
- Machine Dimension : 320*160*330mm

H05

- Hot & Warm Water
- Directly Pipeline Water Dispenser, avoid Secondary Pollution
- Light Indicator
- Suitable for Family, Office Use
- Attractive Design, Small Size & Easy Operation
- Packing Dimension: 355*185*480mm

Household air purifier

VST-XT-666

Rated voltage	220V 50Hz
Rated power	60W
Purification mode	Screen Purification
motor speed	1000 turn
Wind speed stall	4-speed wind
Energy consumption level	High efficiency class
Product size	390x210x620mm
Formaldehyde removal rate	92%
Clean Air Volume of Solid Pollutants	420㎥/h

Household air purifier

VST-KJ-N3

Rated voltage	220V
Rated power	35W
Rated frequency	50Hz
Rated air flow	230m3/H
Rated noise	≤55db
Clean Air Volume of Solid Pollutants	160m³/h
Area of use	1~20
Net weight	6.5Kg
Product size	330X200X550mm

Hydrogen-rich cup VST-H6

Product size: height 21.8cm diameter 7.0cm
Cup body material: borosilicate glass
Product weight: 1KG
Use humidity: 0-40 degrees
Hydrogen concentration: 800-1200PPB
Capacity: 350-450ml
Maximum power: 4W
Rated voltage: 5V
Suitable for mineral water, warm water, cold water

Hydrogen-rich cup VST-H8 / H9

Product size: height 21.0cm diameter 7.0cm
Cup body material: borosilicate glass
Product weight: 1KG
Water temperature is not required
Hydrogen concentration: 1300-1600PPB
Capacity: 350-450ml
Maximum power: 4W
Rated voltage: 5V
Direct heating of water, electrolysis of mineral water
H9 with ventilation system

Reverse Osmosis Direct Drinking Machine
VST-RO75-0053A

- Non-hot gallbladder design to prevent boiling water
- Instantaneous 5 seconds heating
- Nano-electrothermal film quick-heating core
- Special Children's Lock
- Reminder for change of filter element

Product Name: Reverse Osmosis Direct Drinking Machine	Product model: VST-RO75-0053A	Rated power: 2150W
Net water flow: 7.8L/H	Ambient temperature: 4-40 degrees	Total water purity: 2000L
Hot water power: 24L/H (90 degrees)	Environmental humidity: less than or equal to 90%	Applicable water temperature: 5-38 degrees
Filter element combination: polypropylene spray filter element + granular activated carbon filter element + reverse osmosis RO membrane + Post activated carbon		
Purified water quality: in line with the "Standard for Sanitary Safety and Functional Evaluation of Drinking Water Quality Processors - Reverse Osmosis Processing Unit" (2001)		

Energy water purifier
VST-C7N

- Seven-stage strong filtration
- 3 seconds self-changing core
- Safe Food Grade Material

Product Name: Energy Water Purifier	Product model: VST-C7N	Filtration accuracy: 0.0001 micron
Work pressure: 0.1-0.35 Mpa	Product size: 300*280*365mm	Applicable water quality: municipal tap water
Filter element combination: micron grade polyester fiber + reversible network adsorption carbon + water gold + matrix ion exchanger + escape prevention Dual-core, double-core, high-energy molecule cutting sphere, ting MKK hydrophilic membrane and Silver-Carbon dual-core adsorbent core		
The quality of purified water is better than the hygienic standard for drinking water (GB-2006). The sensory and microbial indicators meet the hygienic standard for bottled (barreled) purified drinking water (GB7324-2000)		

Double Water Reverse Osmosis Water Purifier
VST-RO75-0057

- Luxury atmospheric fashion appearance
- Separation of water and electricity, safe and reliable
- Fuselage display screen

Product Name: Double Water Reverse Osmosis Water Purifier	Product model: VST-RO75-0057	Filtration accuracy: 0.0001 micron
Applicable water temperature: 5-38 degrees	Packaging size: 540*240*430mm	Applicable water quality: municipal tap water
Applicable water pressure: 0.1-0.4 Mpa	Net water flow: 0.1L/min	Water tank capacity: 12L
Composition of filter elements: polypropylene spray filter core + pre-activated carbon + ultrafiltration membrane + RO reverse osmosis membrane + Post-Activated carbon		
Purified water quality: Through the Ministry of Health's "Standard Inspection Method for Drinking Water" (GB/5750-2006), it conforms to the Ministry of Health's "Standard for Water Quality Management of Drinking Water" (2001), and is superior to the "Hygienic Standard for Drinking Water" (GB5749-2006).		

Countertop water purifier
VST-RA-T1

- 3 seconds fast heat
- Mobile water bar free installation
- Intelligent large screen control and real-time monitoring

Product name: Countertop Water Purifier	Product model: VST-RO-T1	Rated power: 2200W
Rated voltage: 220V / 50Hz	Applicable water temperature: 4-38 ℃	Heating power: 2100W
Water tank capacity: raw water 7L + pure water 4L	Applicable water pressure: 0.1-0.4Mpa	Type of protection against electric shock: Class I
Filter configuration: PP cotton filter + GAC rear activated carbon filter + RO reverse osmosis membrane filter (clamped)		
Water purification quality: better than the detection of "Sanitary Standards for Drinking Water" (GB5749-2006)		

Countertop water purifier
VST-RA-T3

- 3 seconds fast heat
- 7 gear temperature adjustment, 3 gear water adjustment
- Snap-on RO membrane filter
- Selenium-rich lantern
- Reminder for change of filter element

Product name: Countertop Water Purifier	Product model: VST-RO-T3	Rated power: 2200W
Rated voltage: 220V / 50Hz	Applicable water temperature: 4-38 ℃	Heating power: 2100W
Water tank capacity: raw water 7L + pure water 4L	Applicable water pressure: 0.1-0.4Mpa	Type of protection against electric shock: Class I
Filter configuration: PP cotton filter + composite filter (PP + CTO activated carbon rod) + RO reverse osmosis membrane filter (clamped)		
Purified water quality: in line with the "Standard for Sanitary Safety and Functional Evaluation of Drinking Water Quality Processors - Reverse Osmosis Processing Unit" (2001)		

Intelligent Activated Water Purifier
VST-RO75-0055

- Universal clean water
- Installation-free, plug-in
- IKEA IKESHAN Temperature Adjustment
- Intelligent anti-scalding, super-large screen Android system playback

Product Name: Cool and Hot in One	Product model: VST-RO75-0055	Rated power: 2100W	Applicable water temperature: 5-35 degrees
Work pressure: 0.4-0.8 Mpa	Product size: 455*267*460mm	Intake pressure: 0.1-0.4 Mpa	
Composite filter element combination: composite filter element (PP+activated carbon)+composite filter element (PP+activated carbon rod)+RO membrane			
Clean water quality: better than the "Hygienic Standards for Drinking Water" (GB5749-2006)			

Cooling and heating machine
VST-RO75-0052B

- Luxury atmospheric fashion appearance
- Separation of water and electricity, safe and reliable
- High-end touch screen, filter replacement reminder
- APP One Key Control

RO reverse osmosis electronic faucet	Product model: VST-RO75-0052B	Daily water production: about 370L	Applicable water quality: municipal tap water
Water tank capacity: 7.5L	Rated power: 505W	Adaptation temperature: 5-45 degrees	Filtration accuracy: 0.0001 micron
Filter element combination: 5 micron PP cotton filter + Pre-activated carbon filter + Rear activated carbon filter+1 micron PP cotton filter core + RO reverse osmosis membrane			
Clean water quality: better than the "Hygienic Standards for Drinking Water" (GB5749-2006)			

Clean heat integrator
VST-805

Product name	Vertical Pipeline Machine
Product model	VST-805
Rated voltage	220V 50Hz
Rated power	495W
Heating power	420W
Refrigeration power	75W
Hot water output	2L/min
Cold water output	3L/min

Pipeline terminal series

With the new generation of non-hot gallbladder Second Boiling patented technology, it can be used in a short time.
Heating water to boiling in seconds is a healthy and energy-saving tradition.
Advantages of Hot Gall Drinking Water Machine

Healthy Cancel Hot Boil and Stop Boiling Water

convenient Intelligent Control of Electronic Child Lock

security Separation of water and electricity, people off-line stop

energy conservation Only heat once to eliminate energy waste

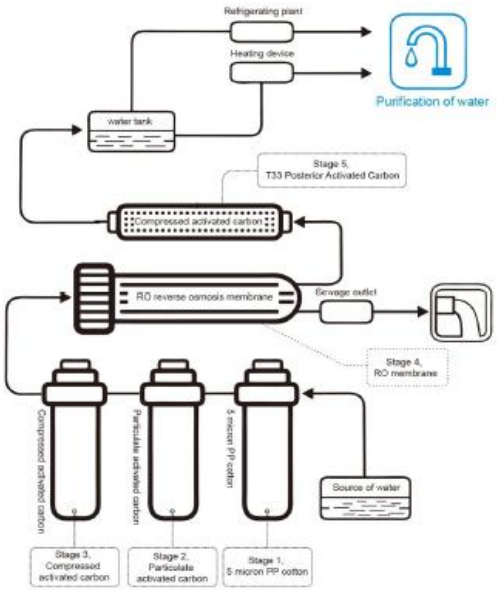

Pipeline machine
VST-5A-G606

- Non-hot gallbladder design to prevent repeated boiling
- Instantaneous 5 seconds heating
- Nano-electrothermal film quick-heating core
- Special Children's Lock
- Design of Dry Burning Prevention
- Ultra-thin design, beautiful and generous
- Steam sterilization is healthier

VST-5A-G605

- 3 seconds hot, ready to drink
- Tempered glass,panel
- Ultrathin fuselage
- Touch screen control button

Product Name: Pipeline Machine	Rated power: 2000W	Rated voltage: 220V 50Hz
Heating capacity: 20L/H	Product size: 360*130*450mm	Working environment: 10-38 degrees
Power consumption: 0.3KW/day	Types of protection against electric shock: Category I	

VST-G816L

- Purification/Heating/Refrigeration Integrated Design
- LED Display Screen
- Fashionable appearance, convenient and intelligent
- Compression refrigeration, faster, lower temperature

Rated voltage	220V 50Hz
Heating power	550W
Pure water yield	189L/24H
Applicable water pressure	0.1-0.35Mpa
Applicable temperature	5-40 degrees
Applicable humidity	Less than 90 percent
Anti-shock type	Class I
Effluent quality	in line with the "Standard for Sanitary Safety and Functional Evaluation of Drinking Water Quality Processors - Reverse Osmosis Processing Unit" (2001)

Air Water Generator

Residential & Office Series

This series is especially suited for humid regions of the world, and has many applications.

* Residences	* Hotels	* Yachts
* Offices	* Government	* Restaurants
* Schools	* Hospitals	* Fitness Clubs

Model No. HR-90HK

- Volt: 220/110V
- Frequency: 50/60Hz
- Water production: 300W
- Heating: 500W
- Water temperature: 4-95℃
- Working temperature: 15-40℃
- Working humidity: 35-95%
- 30 Liters/day generated at 30℃ & 80%RH
- 13 stage filtration and sterilization
- 12.5 Liters of storage capacity
- LCD touch screen
- Hot & Cold pure water output

Model No. HR-88C

- Volt: 220/110V
- Frequency: 50/60Hz
- Water production: 300W
- Working temperature: 15-40℃
- Working humidity: 35-95%
- 30 Liters/day generated at 30℃ & 80%RH
- 12 stage filtration and sterilization
- 16 Liters of storage capacity
- LCD display screen
- Cold pure water output

Model No. HR-77L

- Volt: 220/110V
- Frequency: 50/60Hz
- Water production: 300W
- Heating: 500W
- Water temperature: 4-95℃
- Working temperature: 15-40℃
- Working humidity: 35-95%
- 30 Liters/day generated at 30℃ & 80%RH
- 12 stage filtration and sterilization
- 12.5 Liters of storage capacity
- LCD display screen
- Hot & Cold pure water output

Desktop ZL9510D

- Volt: 220/110V
- Frequency: 50/60Hz
- Total wattage: 900W
- Water production: 400
- Heating: 500W
- Working temperature: 15-40℃
- Working humidity: 35-95%
- 16 Liters/day generated at 30℃& 80%RH
- 8 Liters of storage capacity
- LCD touch screen
- Hot & Cold pure water output

Desktop ZL9510W

- Volt: 220/110V
- Frequency: 50/60Hz
- Total wattage: 430W
- Water production: 400W
- Working temperature: 15-40℃
- Working humidity: 35-95%
- 16 Liters/day generated at 30℃& 80%RH
- 6 Liters of storage capacity
- Ambient pure water output

Contact us:

E-mail: alon_gm@outlook.com or ibsassistant2@idealgroupal.com

Nr: +355692238206 Mr.Erold Balla